

*Smooth The Way With Slider
Slide Your Way With*

knockers



*Sliding Partition
Folding Partition
Sliding Wardrobe
Folding Wardrobe
Sliding Cabinet
Drawer Rail
Lift System
Hinge*

Architectural Hardware ———
————— ***Furniture Fitting***

Sliding Partition**Infront**

Deco 100 GB	1
SYN 60WD & SYN 60GL	2
TLS 02W	3
TLS 02GL	4
P 60	5
P 75 GB	6
P 80	7
P 100	8
P 200	9
P 300	10
V-601 WD	11
V-602 WD	12
V-801 GL	13
V-802 GL	14
V-601 AL	15
V-602 AL	16
V-100	17

Symmetric Sliding Door

V-607 V	18
---------------	----

Invisible Sliding Door

MAGIC 280	19
-----------------	----

Magnetic Sliding Door

MAGNETIC	20
----------------	----

Sliding Pocket Door

FD-066	21
--------------	----

Sliding Cabinet**Infront - Soft close**

V-15	22
P-15	23
P-30	24

Folding Partition**Infront**

FDE-80	25
FDE-100	26
FDE-200	27

Folding Wardrobe

FD-001	28
FD-008	29

Folding Cabinet

FD-068S	30
---------------	----

Sliding Wardrobe**Fortfront - Non Soft Close**

F-5025 / F-5325	31
F-5020 / F-5320	31

Fortfront - Soft Close

SD-032V / SD-033V	31
K-70 / K-73	32
SD-050V / SD-053V	33

In line Sliding

M-35E	34
M-60	35
IK / VIK	36

Wardrobe Hanger Lift

LIFT 1500	37
-----------------	----

Extending Table**Pull Out Table**

TBF-01	38
TBF-02	39

Folding Table

EXT-02	40
EXT-03	41

Coffee Table

CTB-04 & CTB- 09	42
CTB-08 B1 & CTB-08 B2	43
CTB-05 B1 & CTB-05 B2	44
CTB-12 GS	45

Motorized Table

BNTB 01 & 02	46
--------------------	----

Soft Close Hinge**Push to Open**

PTO	47
-----------	----

Glass Door Hinge

GDH	48
-----------	----

Nickel Hinge

SCHE	49
------------	----

Nanometre Hinge

SCH	50
-----------	----

Concealed 165 Hinge

SCB	51
-----------	----

Profile Hinge

PRH	52
-----------	----

Pivot Hinge

PH-001	53
--------------	----

Push to Open and Soft Close

SC-100	54
--------------	----

Lift Up System

GS	55
BIFO-125G	56
LIFT-123G	56

Drawer Rail**Ball Bearing Soft close**

BBSCB	57
-------------	----

Ball Bearing Push Open Soft Close

BBPTSC	58
--------------	----

Ball Bearing Push Open Stabilizer

BBPTSB	59
--------------	----

Undermount Single Soft close

TSMS	60
------------	----

Undermount Full Soft close

TSMF	60
EXTREME	61

Bed**Hidden Wall Bed**

HWB	62
JHWB	63
HWB Motorized	63

Study Desk

STD 2000	64
----------------	----

TV Lift System**Up & Down System**

KF-280	65
TVL BNM	65
TVL BNL	65

Deposit Safety Box**Safety Box**

DB & DBFP	66
-----------------	----

Smart Combination Lock**PIN Code Lock**

F029	67
F023 V/H	67

Fingerprint Lock

F022	67
F033	67
F040	67
F043	67
F050	67
F053	67

PIN + Fingerprint Lock

F020 V/H	67
----------------	----

Furniture Lock**Drawer Lock**

KEK, KRS, KPL, KCL	68
KCS, KCD, MK, RK	68
KLE 022	69
KLK 022	69
COM 04	69

Led Light Cover

LED ALUMUNIUM COVER	70
---------------------------	----

Sensor

PIR, IR & TOUCH SENSOR	73
------------------------------	----

Sliding Partition - Infront







Sliding Partition Door

Type : Deco-100 GB

- Max. weight : 100 kg/door
- Max. Door height : 2400 mm
- Min Door width : 800 mm
- Min. door thickness : 20 - 30 mm
- With mounting bracket (optional)
- Easy installation
- Smooth and silent operation

Type	Description
Deco-100 GB	Fitting set. 1 door max. 100 Kg
Deco-100 GBP	Fitting set. 1 door include upper track 2000mm. 5 pcs wall bracket
Deco-T20	Upper Track Alumunium 2000mm
Deco-T30	Upper Track Alumunium 3000mm
CU-025	Bottom Track Alumunium 2500mm
CU-035	Bottom Track Alumunium 3500mm
BRC-040	Wall mounting bracket with screw

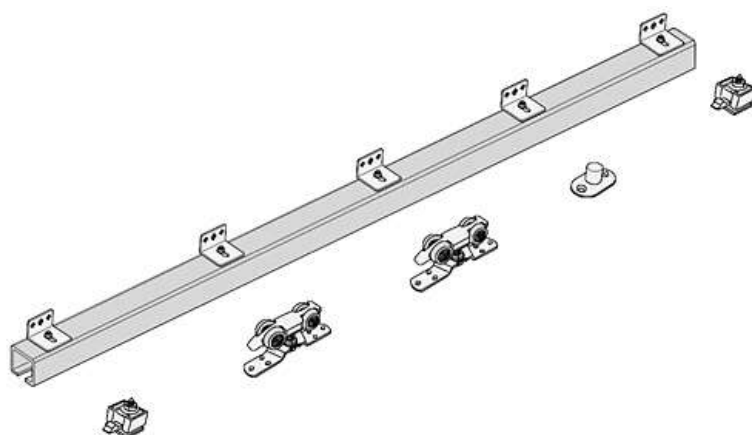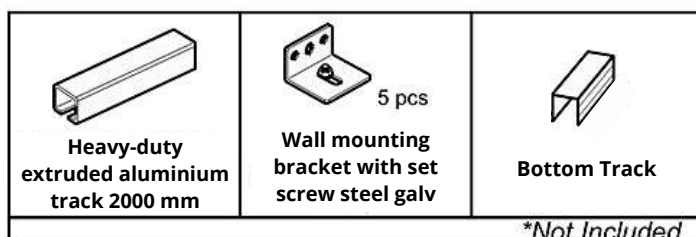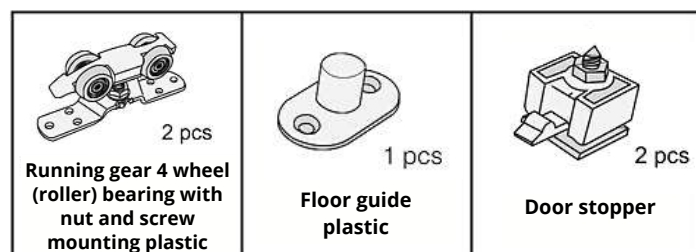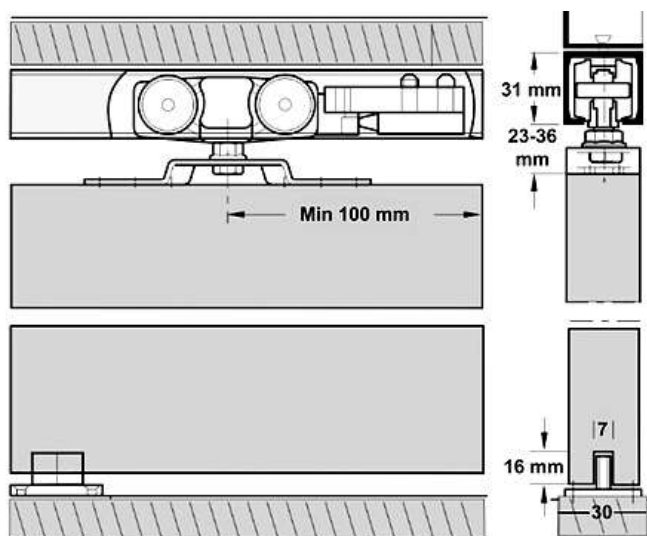

Pocket	Wall Mount	Bypass	Multi-pass


Sliding Symmetric Door Type : Syn - 60 WD



- Max. roller weight : 50 Kg/door
- Max. synchronize weight : 50 Kg/door
- Door height max. : 2400 mm
- Door width min. : 800 mm
- With soft close
- For 2 leaves sliding doors
- Symmetrical opening door
- Two way suspension
- Height and side adjustable
- Working smooth and silently
- Suitable for wooden door & aluminium door

Type	Description
SYN-60WD	Sliding door symmetric 60 Include 2 pcs upper track 2500 mm

*Bracket Not Included

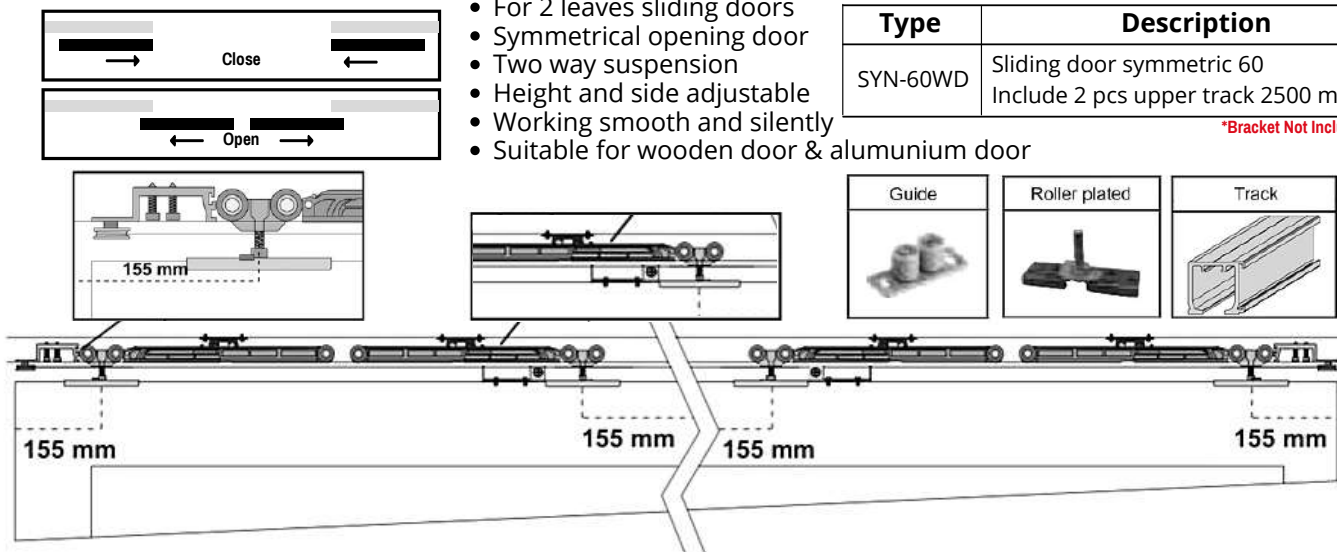


Sliding Symmetric Door for Glass Door Type : Syn - 60GL



- Max. roller weight : 60 Kg/door
- Max. synchronize weight : 50 Kg/door
- Door height max. : 2400 mm
- Door width min. : 800 mm
- With soft close
- For 2 leaves sliding doors
- Symmetrical opening door
- Two way suspension
- Height and side adjustable
- Working smooth and silently

Type	Description
SYN-60GL	Sliding door symmetric 60 Include 2 pcs upper track 2500 mm

*Bracket Not Included

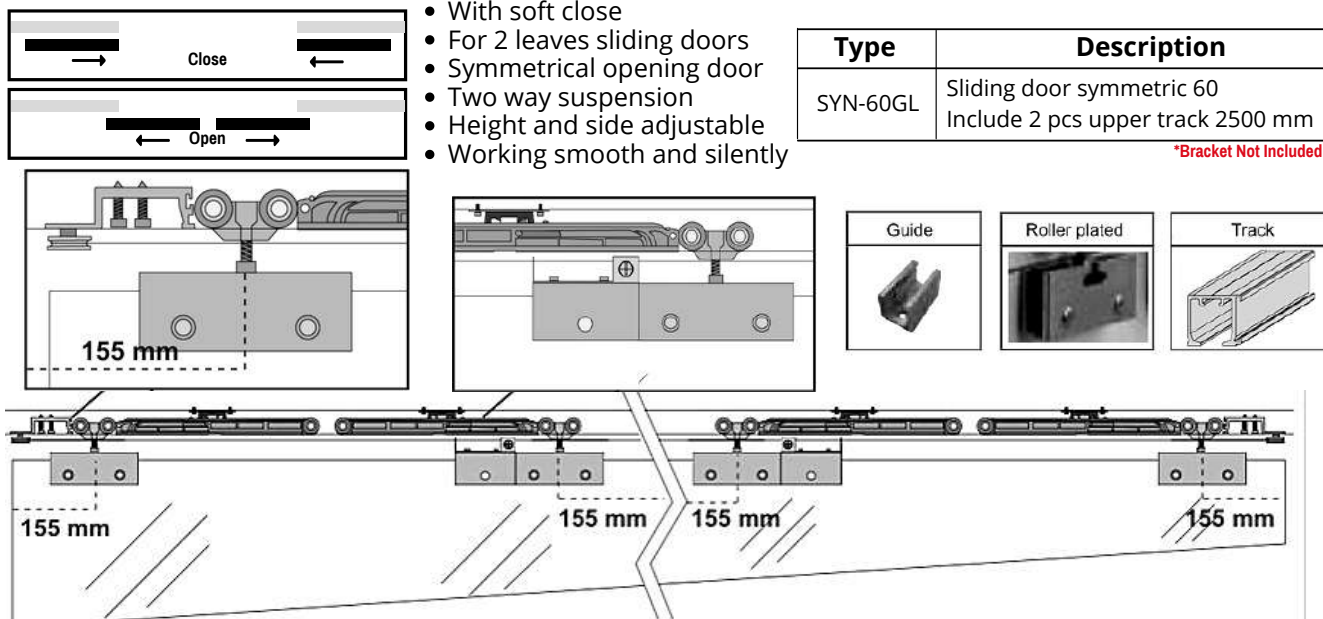

Telescopic Sliding Door System with Soft Close

Type : TLS - 02 WD

- Max. weight : 50 Kg/door
- Max. Door height : 2400 mm
- Min. Door width : 800 mm
- Sliding telescopic door technology for simultaneously 2 or 3 wooden doors
- Run smoothly with longer lifetime and easy operated
- The sliding wooden doors move continuously and simultaneously when at open or closed position
- Operated with / without soft close
- A wooden suspension and retainer profile in a neutral, unadorned and linear design is a convincing solution
- Wooden door retainer system guarantee
- Constantly safety even under heavy use
- Suitable for wooden & aluminium door






Silent and Smooth



With Soft Close

Type	Description
TLS-02 WD	Telescopic set for 2 doors. + 1 fix door
TLS-03 WD	Telescopic set for 3 doors. + 1 fix door
TLS-A2500	Upper Track Aluminium 2500mm
TLS-A3500	Upper Track Aluminium 3500mm
CU-025	Bottom Track Aluminium 2500mm
CU-035	Bottom Track Aluminium 3500mm

Wooden door & aluminium door		3 Doors set	2 Doors set
	Roller with soft close	2 Pcs	2 Pcs
	Roller	4 Pcs	2 Pcs
	Guide	1 Pcs	1 Pcs
	Roller plated 1	2 Pcs	2 Pcs
	Roller plated 2	4 Pcs	2 Pcs
	Guide connector	2 Pcs	1 Pcs
	Upper guide	2 Pcs	1 Pcs
	Bottom guide	2 Pcs	1 Pcs
	Steel connector	4 Pcs	2 Pcs
	Steel wire part	1 Pcs	1 Pcs
	Connector	3 Pcs	2 Pcs
	Steel wire	1 Pcs	1 Pcs

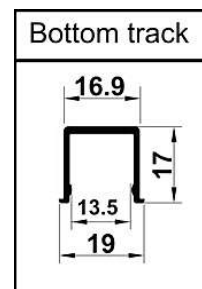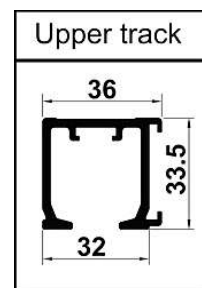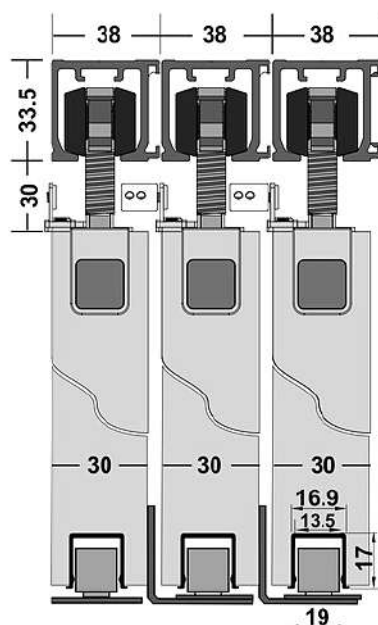

Telescopic Sliding Door System with Soft Close

Type : TLS - 02 GL

- Max. weight : 50 Kg/door
- Max. Door height : 2400 mm
- Min. Door width : 800 mm
- Glass Thickness : 8 - 12 mm
- Sliding telescopic door technology for simultaneously 2 or 3 glass doors
- Run smoothly with longer lifetime and easy operated
- The sliding glass doors move continuously and simultaneously when at open or closed position
- Operated with / without soft close


Type	Description
TLS-02 GL	Telescopic set for 2 doors. + 1 fix door
TLS-03 GL	Telescopic set for 3 doors. + 1 fix door
TLS-A2500	Upper Track Alumunium 2500mm
TLS-A3500	Upper Track Alumunium 3500mm
TLS-B2500	Bottom Track Alumunium 2500mm
TLS-B3500	Bottom Track Alumunium 3500mm






Silent and Smooth



With Soft Close

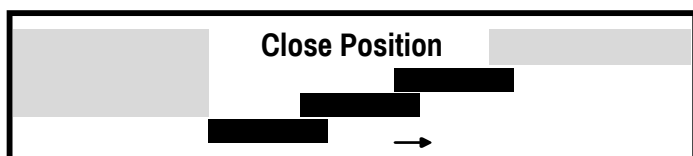

For Glass door		3 Doors set	2 Doors set
	Roller with soft close	2 Pcs	2 Pcs
	Roller	4 Pcs	2 Pcs
	Guide	1 Pcs	1 Pcs
	Roller plated 1	2 Pcs	2 Pcs
	Roller plated 2	4 Pcs	2 Pcs
	Guide connector	2 Pcs	1 Pcs
	Upper guide	2 Pcs	1 Pcs
	Bottom guide	2 Pcs	2 Pcs
	Steel connector	6 Pcs	4 Pcs
	Steel wire part	1 Pcs	1 Pcs
	Connector	2 Pcs	1Pcs
	Steel wire	1 Pcs	1 Pcs

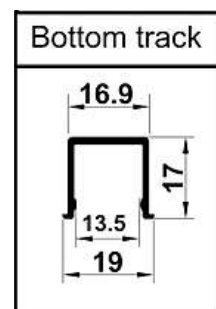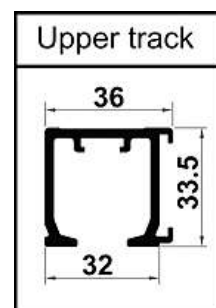
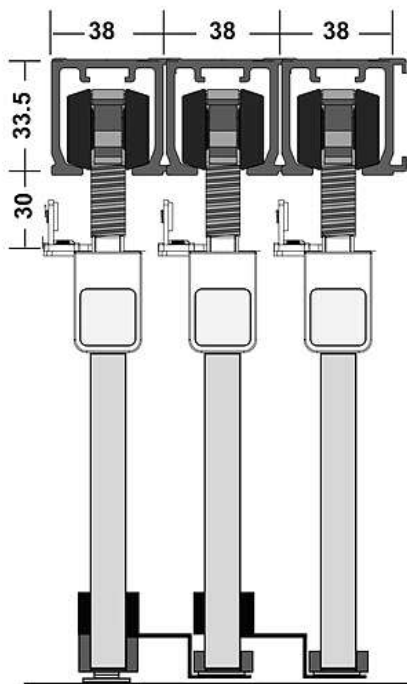


Sliding Partition With Soft Close

Type : P - 60

- Max. weight : 60 Kg/door
- Max. Door height : 2400 mm
- Min. Door width : 800 mm
- Wooden thickness : 25 - 35 mm
- Glass thickness : 10 - 12 mm

Type	Description
P - 60 WD	Fitting set for 1 door include roller (wooden)
P - 60 GL	Fitting set for 1 door include glass clumper (glass)
TPS60 - A2500	Upper Track Alumunium 2500mm
TPS60 - A3500	Upper Track Alumunium 3500mm
CU-025	Bottom Track Alumunium 2500mm
CU-035	Bottom Track Alumunium 3500mm

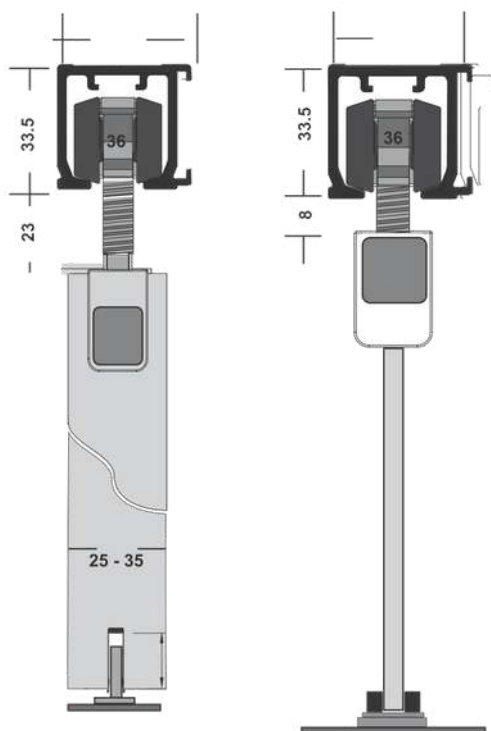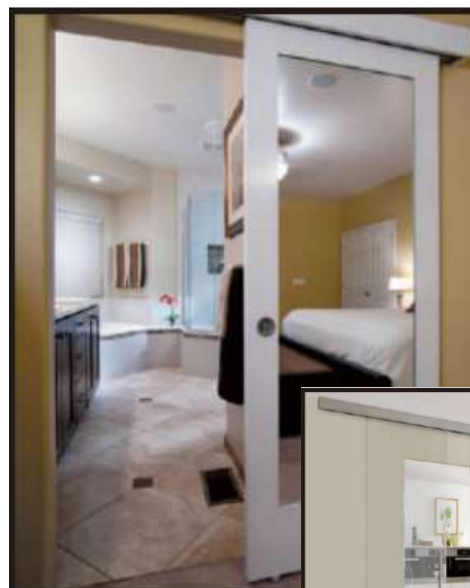

For Wooden or Alumunium Door



For Glass Door



Upper track	Glass clamp cover

Pocket	Wall Mount	Bypass	Multi-pass




Sliding Partition Door With Soft Close

Type : P - 75 GB

- Max. weight : 75 Kg/door
- Max. Door height : 2400 mm
- Min. Door width : 600 - 1250 mm
- Min door thickness : 25 - 35 mm
- With mounting bracket (optional)
- Easy installation
- Smooth and silent operation

Type	Description
P - 75 GB	Fitting set. 1 door max. 75kg
P - 75 GBP	Fitting set. 1 door include upper track 2000 mm + 5 pcswall bracket
TA - 7525	Upper Track Alumunium 2500 mm
CU - 025	Bottom Track Alumunium 2500 mm
BRC - 040	Wall mounting bracket with screw

For Wooden or alumunium Door

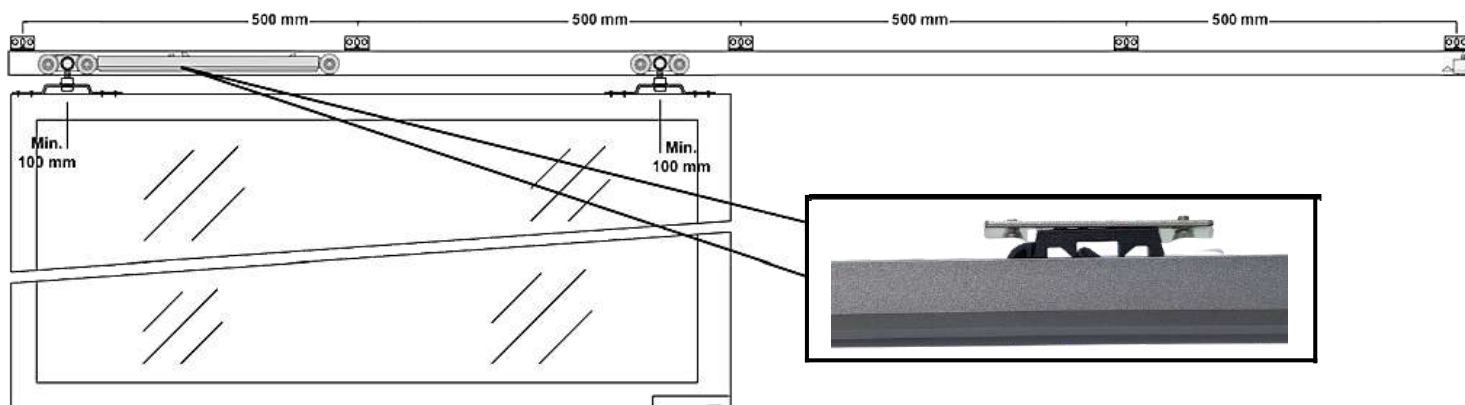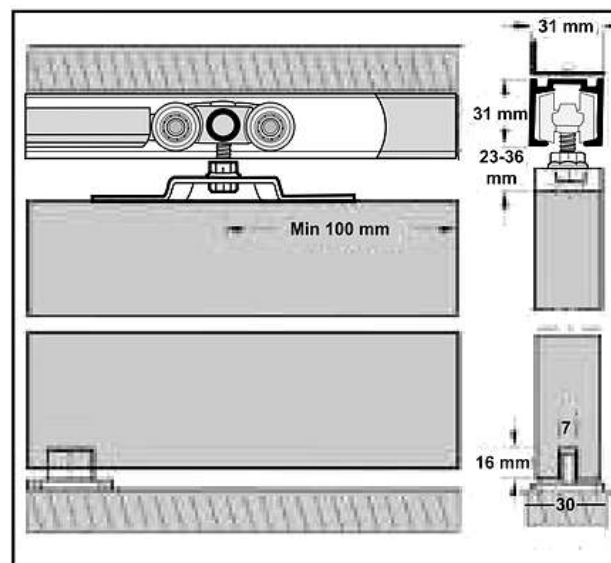


Sliding Partition Door With Soft Close

Type : P - 80

- Max. weight : 80 Kg/door
- Max. Door height : 2400 mm
- Min. Door width : 800 mm
- Door thickness : 25 - 35 mm
- For wooden door and aluminium frame
- For glass door
- A medium duty commercial / residential grade sliding door hardware system
- Compact extruded aluminium track


Type	Description
P - 80 WD	Fitting set for 1 door max.80kg/door.
P - 80 GL	Fitting set for 1 door max.80kg/door include clampper
TPS80 - A2500	Upper Track Aluminium 2500 mm
TPS80 - A3500	Upper Track Aluminium 3500 mm
CU - 025	Bottom Track Aluminium 2500mm
CU - 035	Bottom Track Aluminium 3500mm

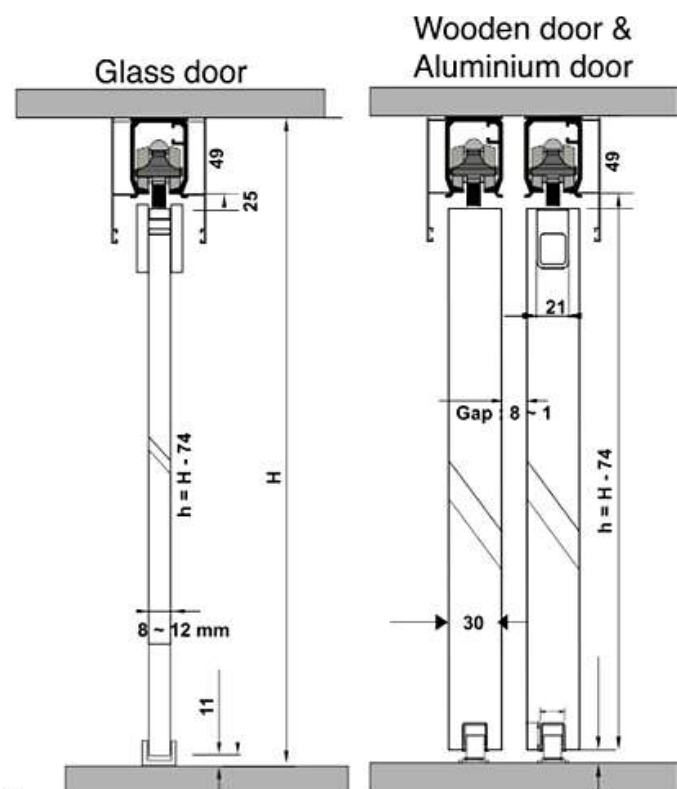

For Wooden or aluminium Door



For Glass Door

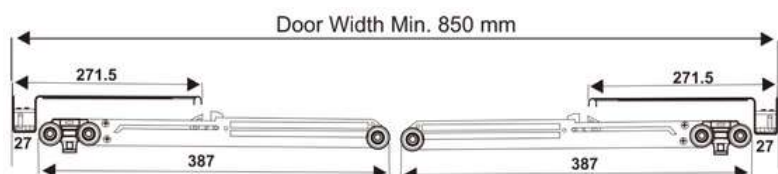


Sliding Partition Door With Soft Close

Type : P - 100

- Max. weight : 100 Kg/door
- Max. Door height : 2400 mm
- Min. Door width : 850 mm
- Door thickness : 25 - 35 mm
- For wooden door and aluminium frame
- For glass door
- A medium duty commercial / residential grade sliding door hardware system
- Compact extruded aluminium track
- Features low friction convex rails for easy rolling
- Completely adjustable and feature machine
- Turned ball bearing wheels for smooth operation




Type	Description
P - 100 WD	Fitting set for 1 door max.100kg/door
P - 100 GL	Fitting set for 1 door max.100kg/door include clampper
TP100 - A2500	Upper Track Alumunium 2500 mm
TP100 - A3500	Upper Track Alumunium 3500 mm
CU - 025	Bottom Track Alumunium 2500mm
CU - 035	Bottom Track Alumunium 3500mm

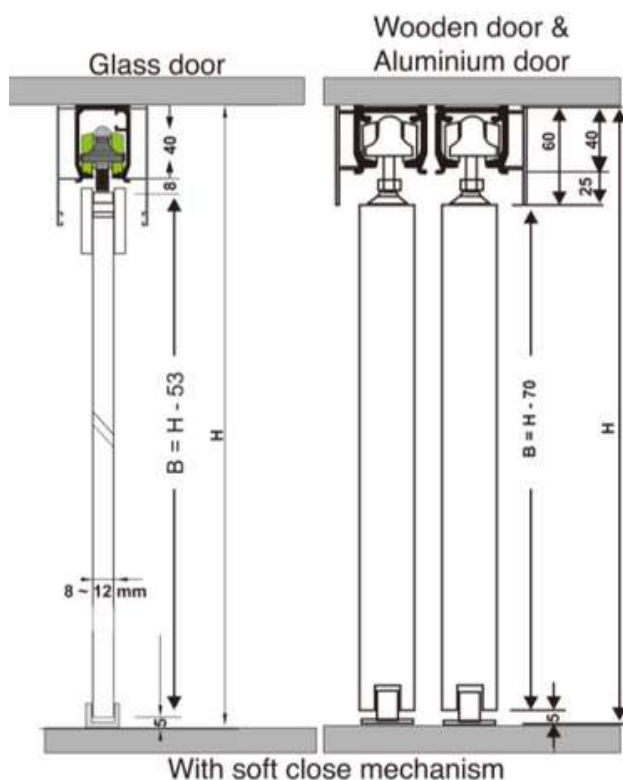

For Wooden / Alumunium Door



For Glass Door

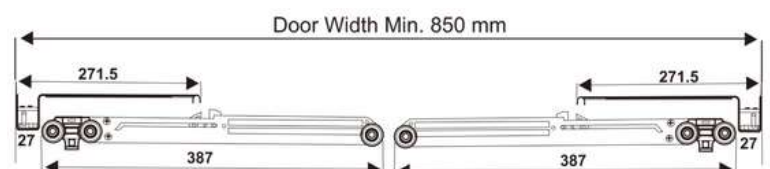

Sliding Partition Door With Soft Close

Type : P - 200

- Max. weight : 200 Kg/door
- Door height : 2400 mm
- Door width : 800 mm
- Door thickness : 25 mm
- For wooden door and aluminium frame
- For glass door
- A medium duty commercial / residential grade sliding door hardware system
- Compact extruded aluminium track
- Features low friction convex rails for easy rolling
- Completely adjustable and feature
- Turned ball bearing wheels for smooth operation




For Wooden / Aluminium Door



For Glass Door



Type	Description
P - 200 WD	Fitting set for 1 door max.200kg/door
P - 200 GL	Fitting set for 1 door max.200kg/door include clampper
TP200 - A2500	Upper Track Aluminium 2500 mm
TP200 - A3500	Upper Track Aluminium 3500 mm
TP200 - B2500	Bottom Track Aluminium 2500mm
TP200 - B3500	Bottom Track Aluminium 3500mm

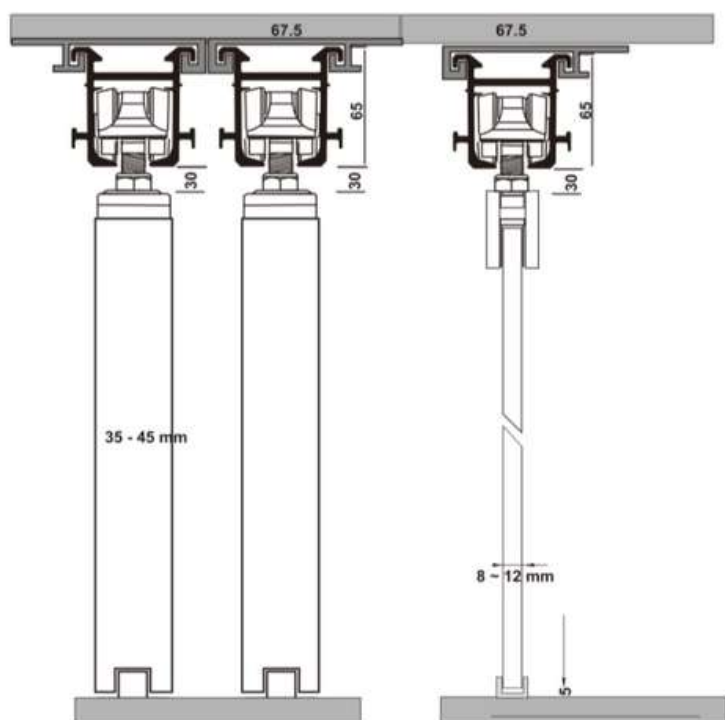

Upper track	Under track
Floor guide	Floor guide

Sliding Partition Door With Soft Close

Type : P - 300

- Max. weight : 300 Kg/door
- Door height : 2400 mm
- Door width : 800 mm
- Door thickness : 25 mm
- For wooden door and aluminium frame
- For glass door
- A medium duty commercial / residential grade sliding door hardware system
- Compact extruded aluminium track
- Features low friction convex rails for easy rolling
- Completely adjustable and feature
- Turned ball bearing wheels for smooth operation




For Wooden / Aluminium Door



For Glass Door



Type	Description
P - 300WD	Fitting set for 1 door max.300kg/door
P - 300GL	Fitting set for 1 door max.300kg/door include clampper
TP300 - A2500	Upper Track Aluminium 2500 mm
TP300 - A3500	Upper Track Aluminium 3500 mm
TP300 - B2500	Bottom Track Aluminium 2500mm
TP300 - B3500	Bottom Track Aluminium 3500mm

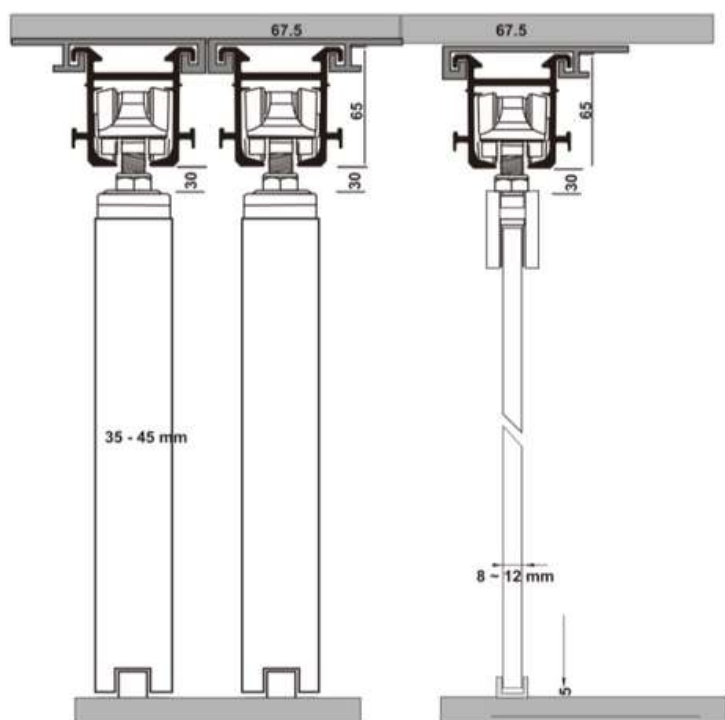

Upper track	Under track
Floor guide	Floor guide

Soft Close Sliding Partition Door

Type : V-601 WD

Door width : Min. 600 – Max. 1500 mm


Door height : Max. 2400 mm

Door thickness : 25 – 40 mm

Easy installation and remove




Apply to wooden door (single & double)

High precise roller, stable, smooth, and silent sliding

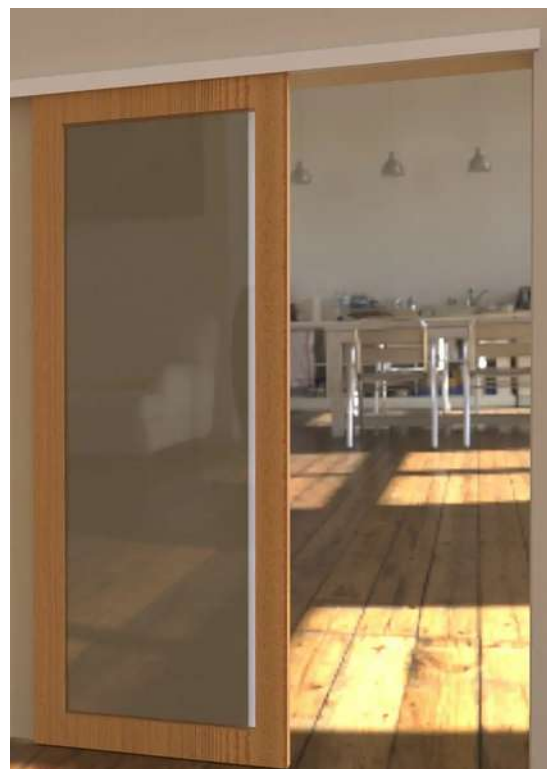

Type	Description
V-601 WD	Fitting set. 1 door max. 60 Kg
V-801 WD	Fitting set. 1 door max. 80 Kg
V-1001 WD	Fitting set. 1 door max. 100 Kg
TV-2500	Upper Track 2500mm & Bottom Track 1250mm
TV-3500	Upper Track 3500mm & Bottom Track 1750mm

Item	Qty
Hanging Plate	2
Damper	1
Roller	1
Damper stopper	2
Door Stopper	1
Bottom guide	1

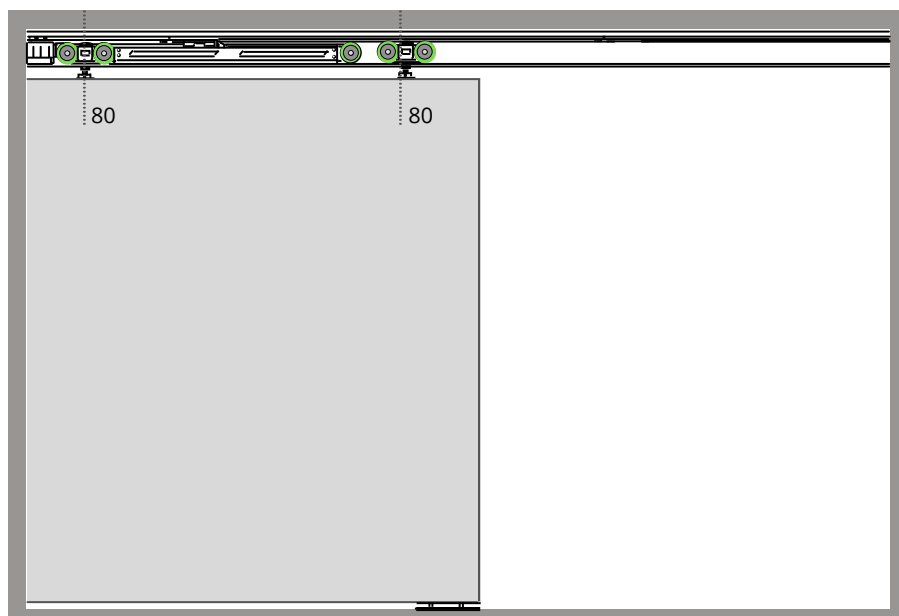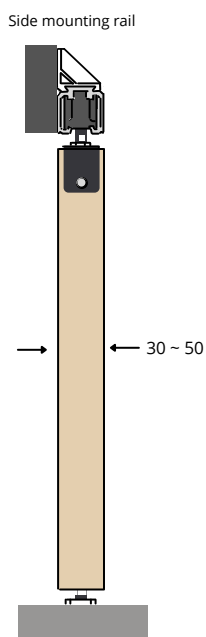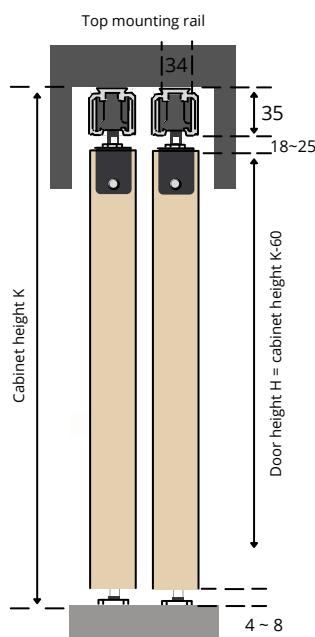

Soft Close Sliding Partition Door

Type : **V-602 WD**

Door width : Min. 850 – Max. 1500 mm

Door height : Max. 2400 mm

Door thickness : 25 – 40 mm

Easy installation and remove




Apply to wooden door (single & double)

High precise roller, stable, smooth, and silent sliding



Type	Description
V-602 WD	Fitting set. 1 door max. 60 Kg
V-802 WD	Fitting set. 1 door max. 80 Kg
V-1002 WD	Fitting set. 1 door max. 100 Kg
TV-2500	Upper Track 2500mm & Bottom Track 1250mm
TV-3500	Upper Track 3500mm & Bottom Track 1750mm

Item	Qty
Hanging Plate	2
Damper	2
Door Stopper	2
Damper stopper	2
Bottom guide	1

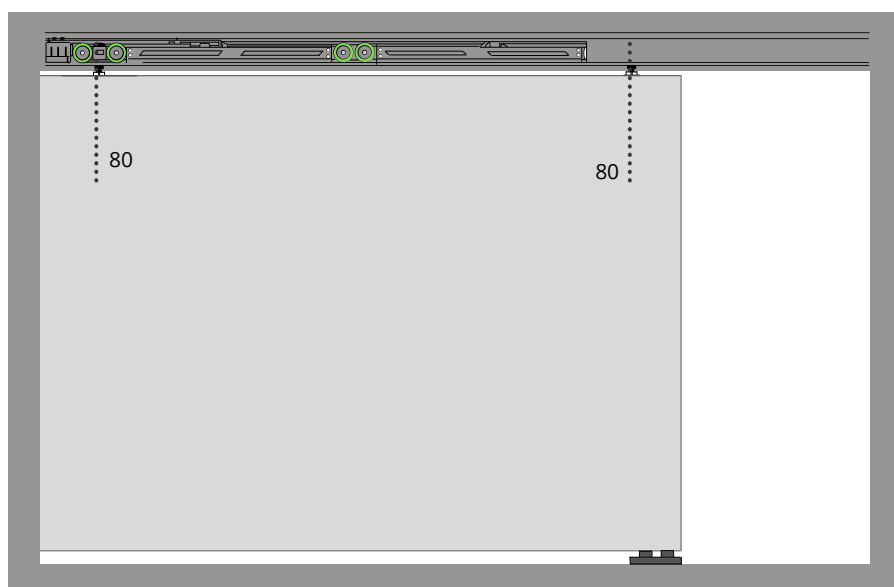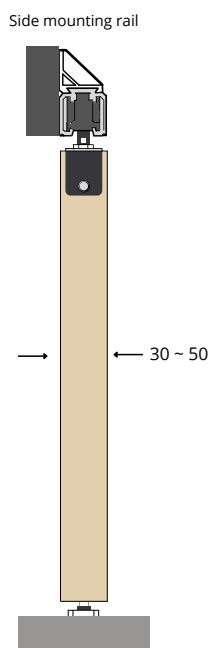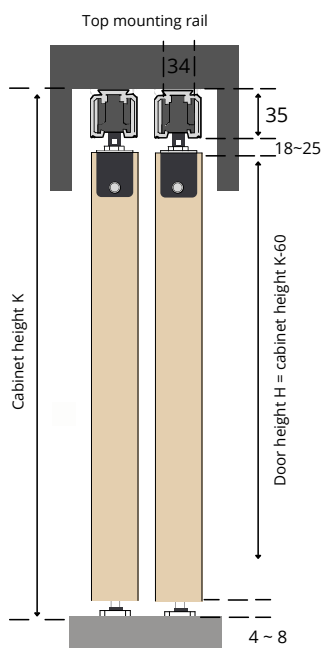

Soft Close Sliding Partition Door

Type : **V-801 GL**

Door weight : 80 Kg

Door width : Min. 600 – Max. 1500 mm

Door height : Max. 2400 mm

Door thickness : 8 - 12 mm



Easy installation and remove

Apply to glass door (single and double)

High precise roller, stable, smooth, and silent sliding

Type	Description
V-801GL	Fitting set. 1 door max. 80 Kg
TV-2500	Upper Track 2500mm & Bottom Track 1250mm
TV-3500	Upper Track 3500mm & Bottom Track 1750mm

Item	Qty
Hanging Plate	2
Damper	1
Roller	1
Damper stopper	2
Door Stopper	1
Bottom guide	1

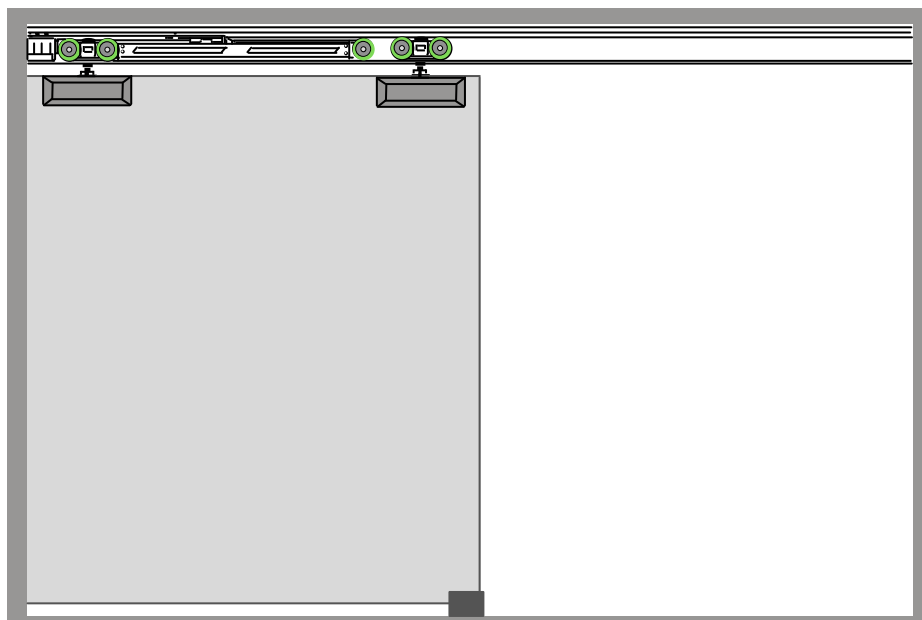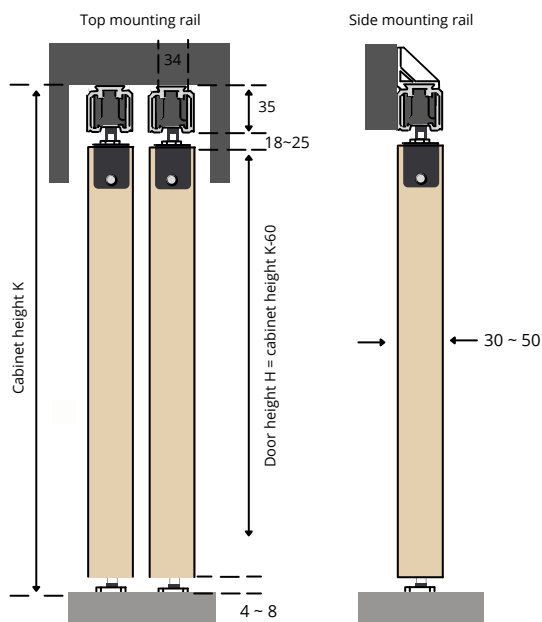

Soft Close Sliding Partition Door

Type : V-802 GL

Door width : Min. 850 – Max. 1500 mm

Door height : Max. 2400 mm

Door thickness : 8 - 12 mm

Easy installation and remove



Apply to glass door (single and double)

High precise roller, stable, smooth, and silent sliding

Type	Description
V-802GL	Fitting set. 1 door max. 80 Kg
TV-2500	Upper Track 2500mm & Bottom Track 1250mm
TV-3500	Upper Track 3500mm & Bottom Track 1750mm



Item	Qty
Hanging Plate	2
Damper	2
Door Stopper	2
Damper stopper	2
Bottom guide	1

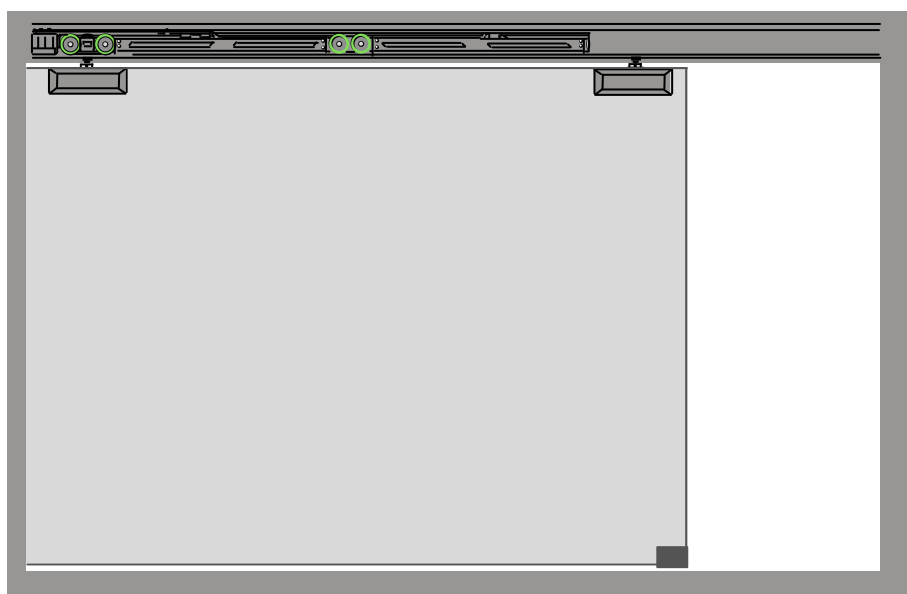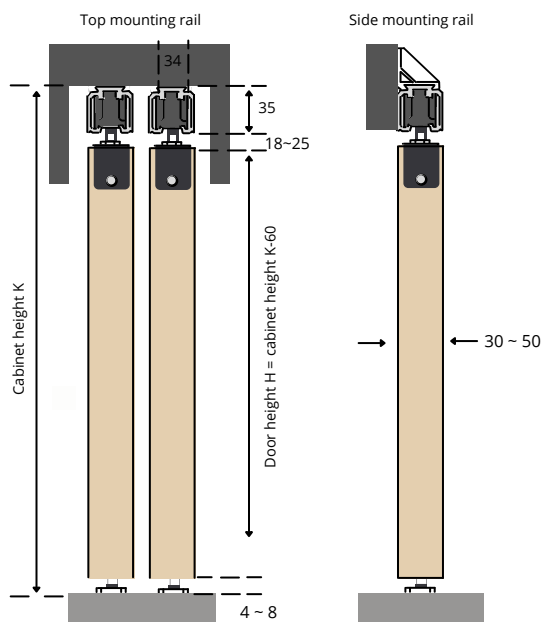

Soft Close Sliding Partition Door

Type : V-601 AL

Door width : Min. 600 – Max. 1500 mm

Door height : Max. 2400 mm

Door thickness : 25 – 40 mm

Easy installation and remove


Apply to aluminium door (single and double)

High precise roller, stable, smooth, and silent sliding



Type	Description
V-601 AL	Fitting set. 1 door max. 60 Kg
V-801 AL	Fitting set. 1 door max. 80 Kg
V-1001 AL	Fitting set. 1 door max. 100 Kg
TV-2500	Upper Track 2500mm & Bottom Track 1250mm
TV-3500	Upper Track 3500mm & Bottom Track 1750mm

Item	Qty
Hanging Plate	2
Damper	1
Roller	1
Damper stopper	2
Door Stopper	1
Bottom guide	1

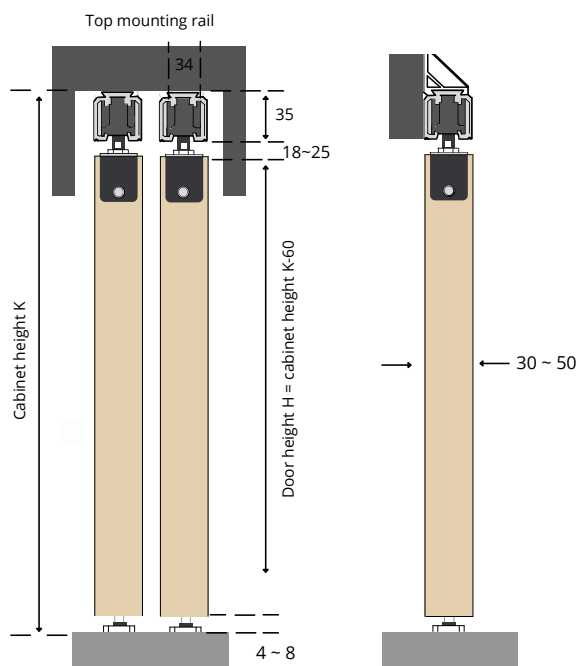

Soft Close Sliding Partition Door

Type : **V-602 AL**

Door width : Min. 850 – Max. 1500 mm

Door height : Max. 2400 mm

Door thickness : 25 - 40 mm

Easy installation and remove



Apply to aluminium door (single and double)

High precise roller, stable, smooth, and silent sliding



Type	Description
V-602 AL	Fitting set. 1 door max. 60 Kg
V-802 AL	Fitting set. 1 door max. 80 Kg
V-1002 AL	Fitting set. 1 door max. 100 Kg
TV-2500	Upper Track 2500mm & Bottom Track 1250mm
TV-3500	Upper Track 3500mm & Bottom Track 1750mm

Item	Qty
Hanging Plate	2
Damper	2
Door Stopper	2
Damper stopper	2
Bottom guide	1

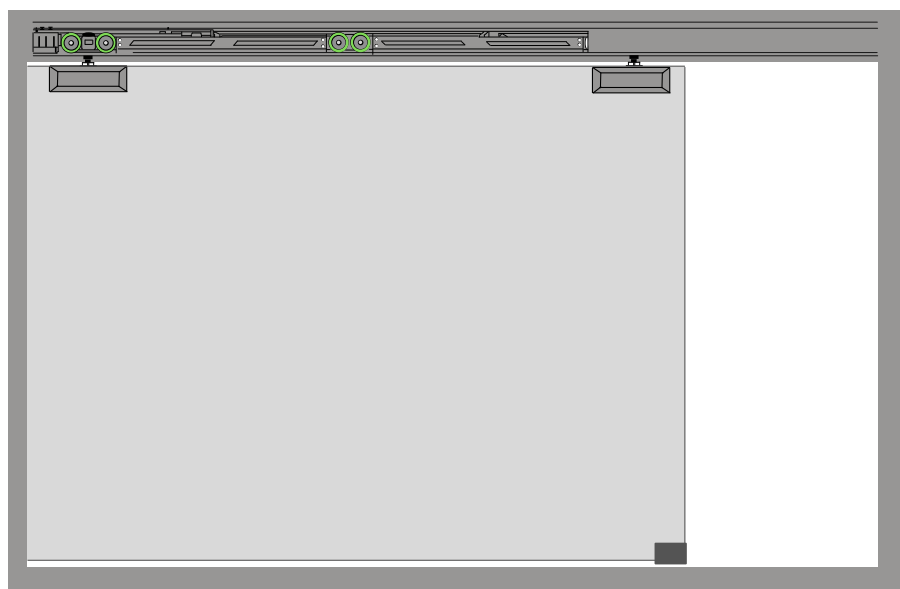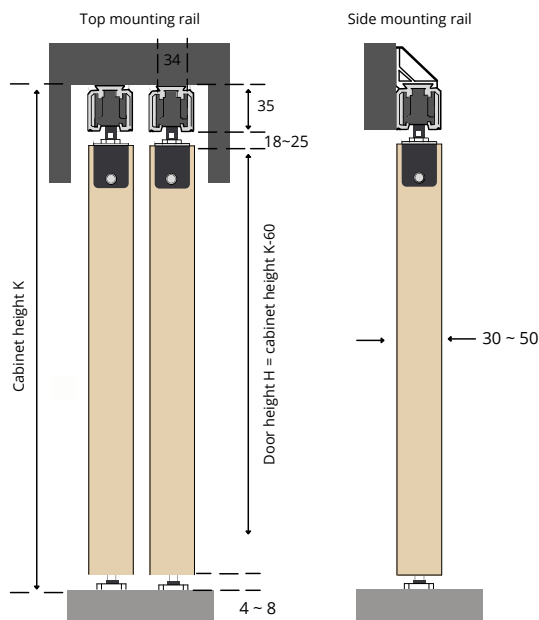

Sliding Partition - Infront

Sliding Partition Door

Type : V-100

Max weight : 100 Kg

Min. Door width : 800 - 1500 mm

Max. Door height : 2400 mm

Door thickness : 25 - 40 mm

Suitable aluminium and wooden door

High precise roller, stable, smooth, and silent sliding

Type	Description
V-100 WD	Fitting set 100 kg for 1 wooden door
V-100 AL	Fitting set 100 kg for 1 aluminium door
TV-2500	Upper Track 2500mm & Bottom Track 1250mm
TV-3500	Upper Track 3500mm & Bottom Track 1750mm



Item	Qty
Hanging Plate	2
Roller	2
Door Stopper	2
Bottom Guide	1



For wooden door



For aluminium door



Soft Close Sliding Partition Door

Type : **SYN 607 V**

Door weight : 60 Kg

Door width : 850-1250 mm

Door height : 2400 mm

Door thickness : 25-40 mm


Easy installation and remove

Apply to glass door (single and double)



High precise roller, stable, smooth, and silent sliding



Type	Description
SYN-607V	Sliding Wooden Door Synchronize 2 Doors
TV-2500	Upper Track 2500mm & Bottom Track 1250mm
TV-3500	Upper Track 3500mm & Bottom Track 1750mm

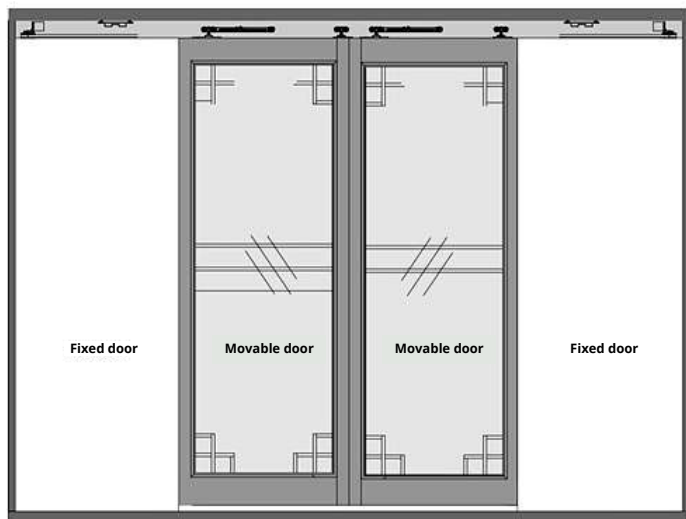

Item	Qty for 2 door	Qty for 4 door
Rollers	2	6
Damper stopper	2	2
Roller with damper	2	2
Transmission belt	12 m	3m, 3m, 18m
Belt connector	1	1
Top Hanging plate	2	2
Belt fixing hanging plate	2	2
Down guider	2	2
Linkage down guider	1	2

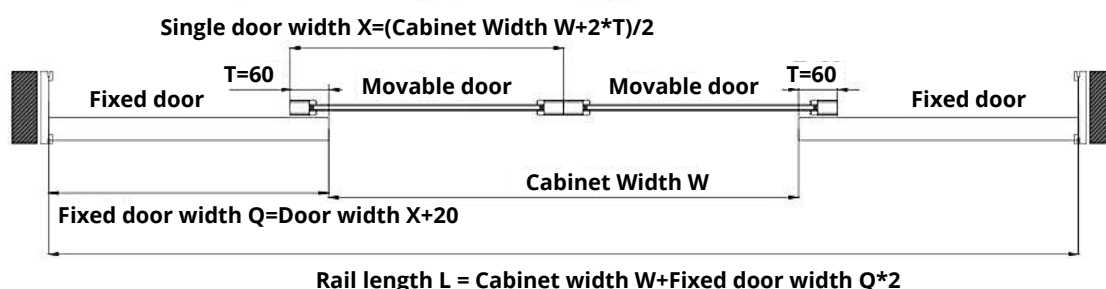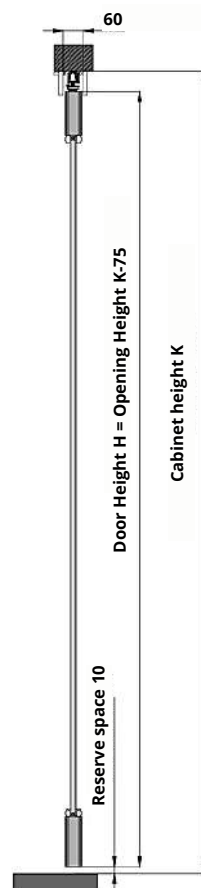

Invisible Sliding Magic Door

Type : **Magic 280**

Door weight max : 80 kg


Door width min : 800 - 1200 mm

Door height max : 2400 mm

Door thickness min : 25 - 40 mm

Door material : wood


The sliding system is hidden behind door

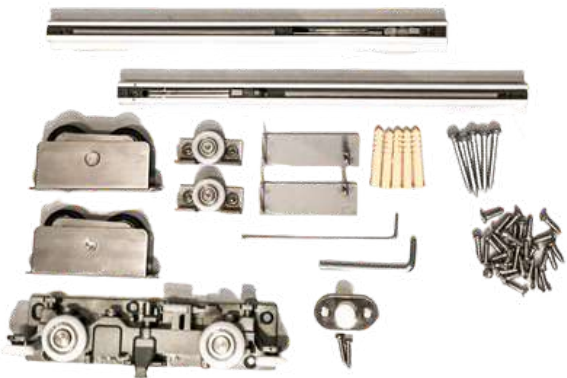


Adjustment for door height
Adjustment of door from wall
Adjustment of door parallel from wall



Upper Roller

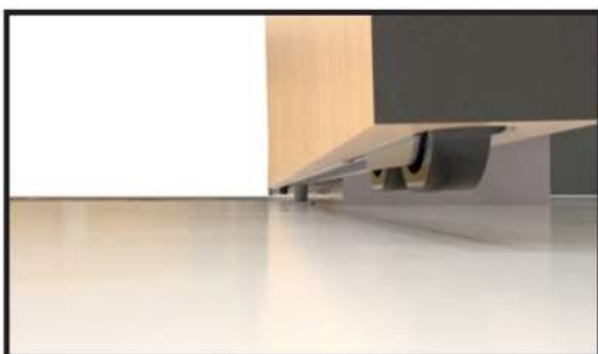

Bottom Roller

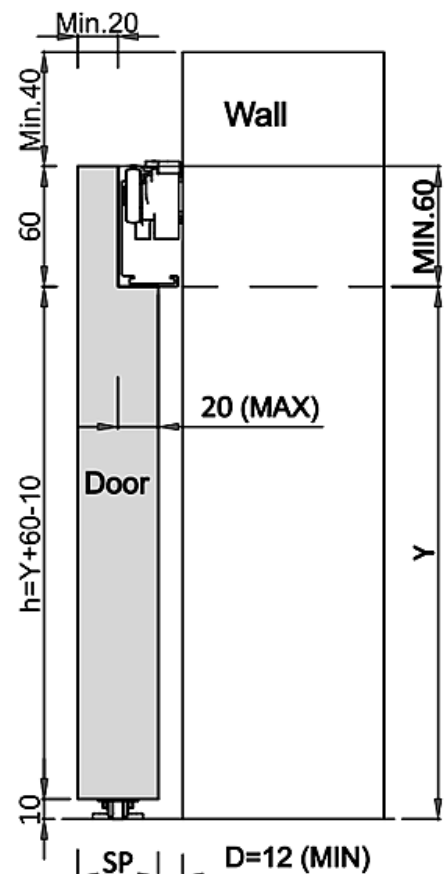

Magnetic Sliding Partition Door

Type : **MAG**

Max. Door height : 2400 mm
Door thickness : 30 - 40 mm for wooden door
10 - 12 mm for glass door
Max. Door weight : 70 Kg
Rate Voltage : 220V
Average : 40W

Quiet and smooth opening or closing
Can electric or manual operated
Optional version : sensor, touch, and smart lock




Type	Description
MAG - 194	Door width. Min: 970mm. Max: 1000mm
MAG - 214	Door width. Min: 1070mm. Max: 1100mm
MAG - 234	Door width. Min: 1170mm. Max: 1200mm




Sliding Pocket Door System

Type : FD-066




Door width : max 600 mm
 Door height : 1800 - 2850 mm
 Door thickness : 18 - 30 mm
 Door depth : 400 - 600mm
 Door weight : <35kg /door
 Make your room unique, modern, saving space

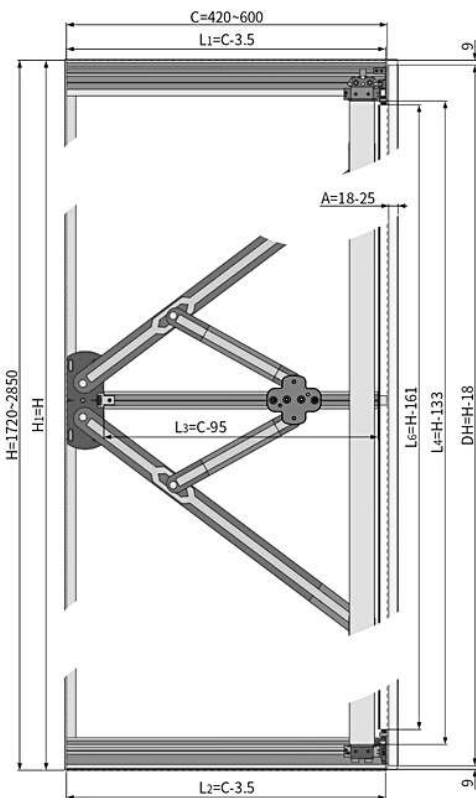

A	The thickness of the door panel	L1	The length of the upper track
C	The depth of the cabinet	L2	The length of the bottom track
C1	The depth of the seal panel	L3	The length of the middle track
H	The height of the cabinet	L4	The height of the axis
H1	The height of the seal panel	L5	The length of the connected panel
DH	The height of the door panel	L6	The length of the profile for weather strip & brusher
DW	The width of the door panel		
DW1	The depth of the pocket	W	The width of the cabinet

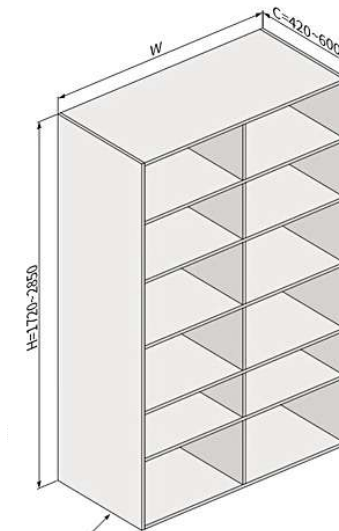

Note: No Baseboard

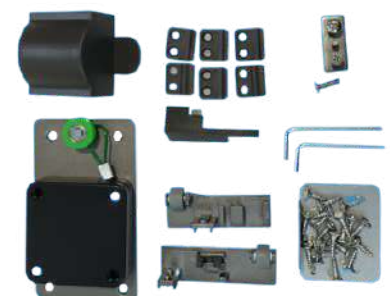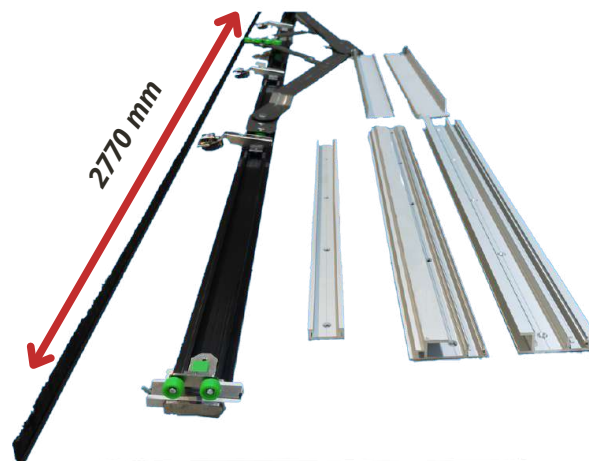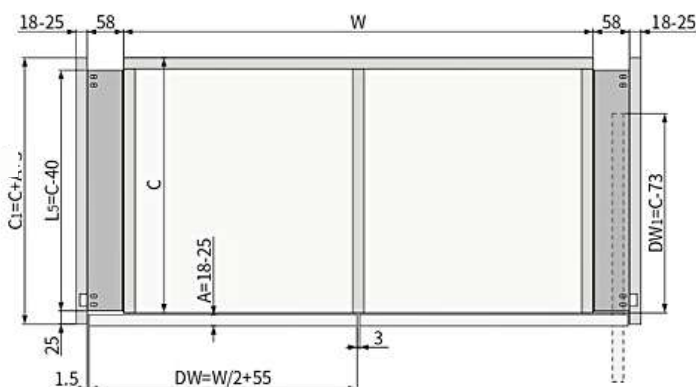

Sliding Cabinet with Soft Close

Type : **V-15**

Max weight : 15 Kg/door

Door width : 520 mm

Door height : 2400 mm

Available for wooden and glass door

Cabinet sliding with soft close

Easy installation and remove

With adjustable damper

Type	Description
V-15 GL	Fitting set 15 kg for 1 glass door
V-15 WD	Fitting set 15 kg for 1 wooden door
TV15-2000	Upper Track 2000 mm
TV15-2500	Upper Track 2500 mm
TV15-4000	Upper Track 4000 mm




Item	Qty
Top Hung Components	2
Damper	2
Damper Stopper	2
Positioning plate	1



For glass door



For wooden door

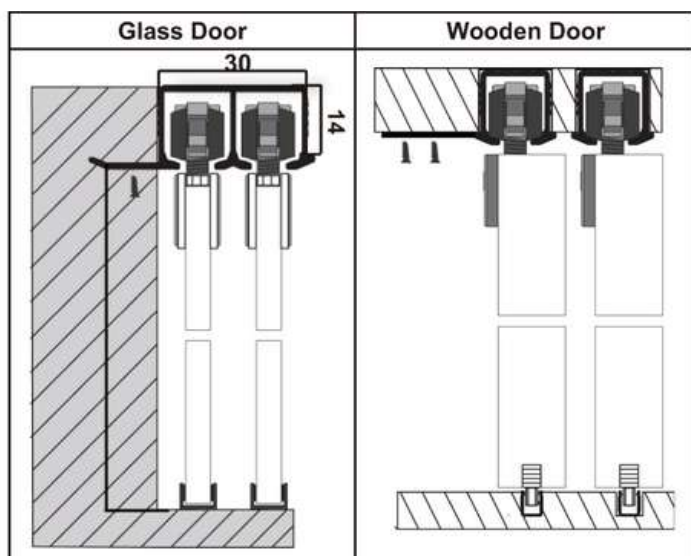



Sliding Cabinet with Soft Close

Type : P-15

- Max weight : 15 Kg/door
- Min. Door width : 520 mm
- Max. Door height : 2400 mm
- Available for wooden and glass door
- Cabinet sliding with soft close
- Easy installation and remove
- With adjustable damper



Type	Description
P - 15 WD	Fitting set 15 kg for 1 wooden door
TPS15 - 020A	Upper track 2000 mm
TPS15 - 025A	Upper track 2500 mm
TPS15 - 040A	Upper track 4000 mm
TA - 030	Bottom track 2500 mm

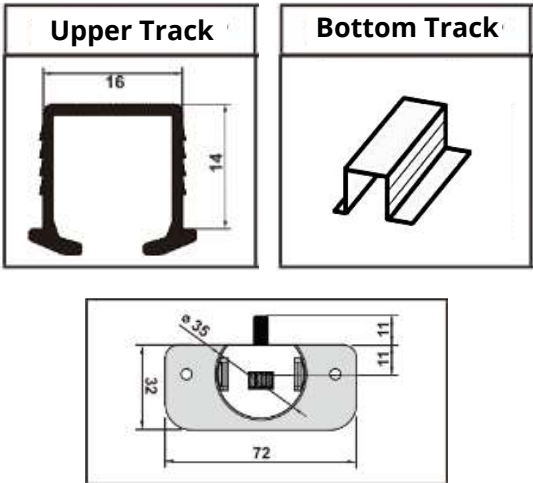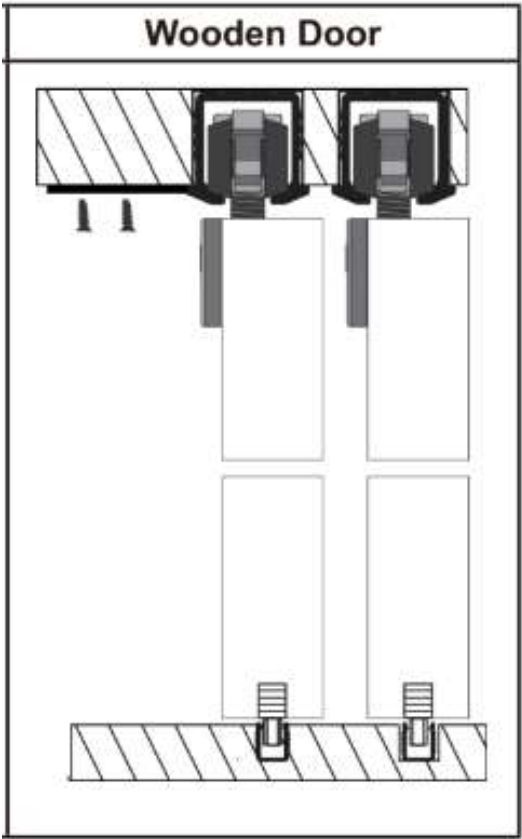

Sliding Cabinet - Infront

Sliding Cabinet with Soft Close

Type : **P-30**

Max weight : 30 kg/door

Door width : 800 mm

Door height : 2400 mm

Available for wooden and glass door

Cabinet sliding with soft close

Easy installation and remove

With adjustable damper











Type	Description
P - 30 WD	Fitting set 30 kg for 1 wooden door
P - 30 GL	Fitting set 30 kg for 1 glass door
TPS30 - 025A	Upper Track 2500 mm
TPS30 - 035A	Upper Track 3500 mm
CU-025	Bottom Track 2500 mm
CU-035	Bottom Track 3500 mm



For wooden door



For glass door

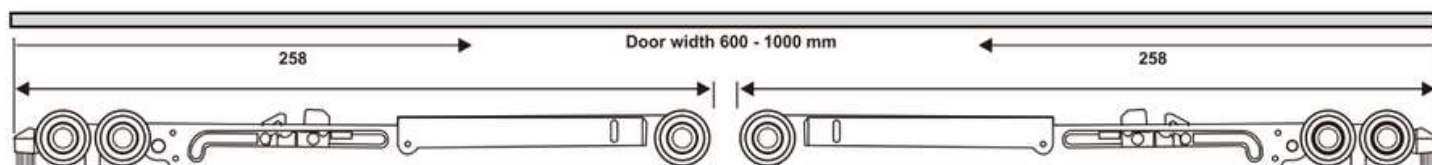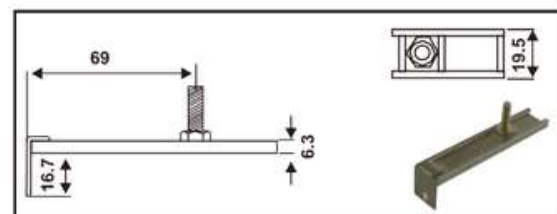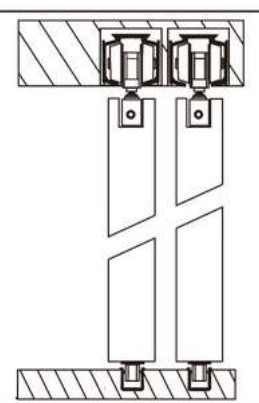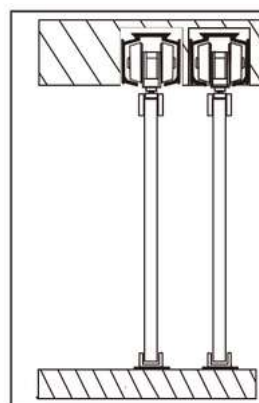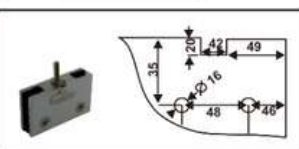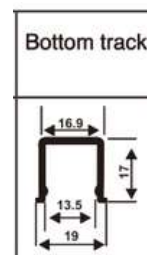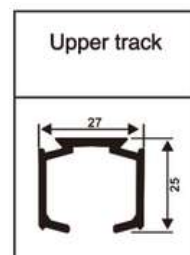

Folding Partition Door

Type : FDE-80

Door thickness : 27 - 40 mm

Max. Door height : 2400 mm

Min. Door width : 800 mm

For 2, 4 and 6 doors installation

2 doors system : Max weight 80 kg/door

4 and 6 doors system : Max weight 40 kg/door

Smooth and quite operation




2 doors application can be installed without lower guide track


Left and right interchangeable



Type	Description
FDE80-02	Fitting set for 2 doors, incl. clip hinge
FDE80-04	Fitting set for 4 doors, incl. clip hinge, SOSS Hinge
FDE80-06	Fitting set for 6 doors, incl. clip hinge, SOSS Hinge
TDFE-025	Upper Track Alumunium 2500mm
TDFE-035	Upper Track Alumunium 3500mm
CU-025	Bottom Track Alumunium 2500mm
CU-035	Bottom Track Alumunium 3500mm
SOSS-10	Concealed hinge

Suitable for wooden door & alumunium door

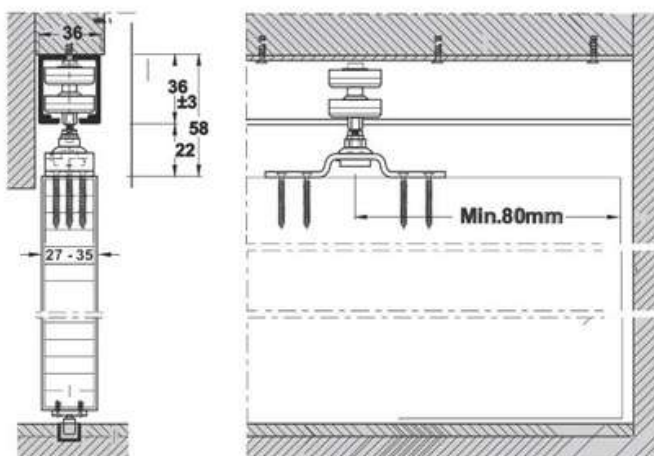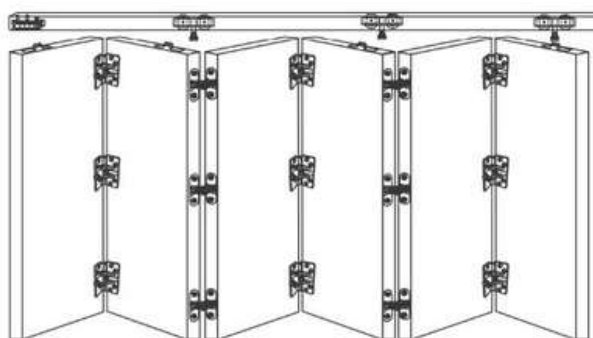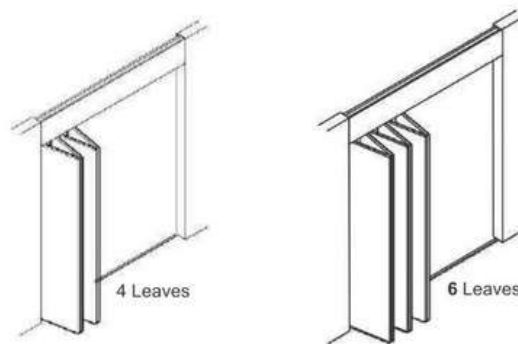

						
Clip Hinge	Roller	Pivot Upper	Pivot Bottom	SOSS Hinge	Running track	Bottom track

Folding Partition Door

Type : FDE-100

**Herculean, Great Product
From Our Bifold Hardware**

Weight: 100 kg/door

Max. Door height: 2400 mm

Min. Door width: 800 mm

Door thickness: 25 - 35 mm


For 2, 4 and 6 doors installation

2 doors system : Max weight 100 kg/door

4 and 6 doors system : Max weight 50 - 60 kg/door





Type	Description
FDE100-02	Fitting set for 2 doors, incl. clip hinge
FDE100-04	Fitting set for 4 doors, incl. clip hinge
FDE100-06	Fitting set for 6 doors, incl. clip hinge
FDE100-08	Fitting set for 8 doors, incl. clip hinge
TA100-025	Upper Track Alumunium 2500mm
TA100-035	Upper Track Alumunium 3500mm
UTA100-025	Bottom Track Alumunium 2500mm
UTA100-035	Bottom Track Alumunium 3500mm

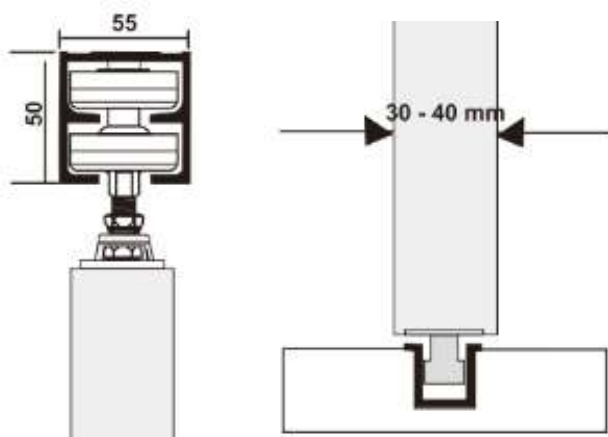


Type: FDE-100		2 doors	4 doors	6 doors	8 doors
	Roller	1 pcs	2 pcs	3 pcs	4 pcs
	Clip hinge	3 pcs	6 pcs	9 pcs	12 pcs
	Pivot upper	1 pcs	1 pcs	1 pcs	1 pcs
	Pivot bottom	1 pcs	1 pcs	1 pcs	1 pcs
	SOSS hinge		3 pcs	9 pcs	12 pcs

Edge Mount

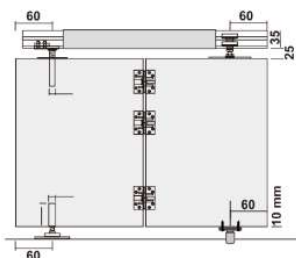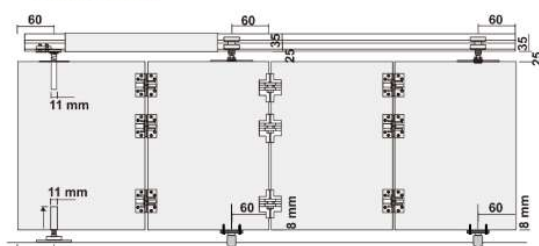

Center Mount

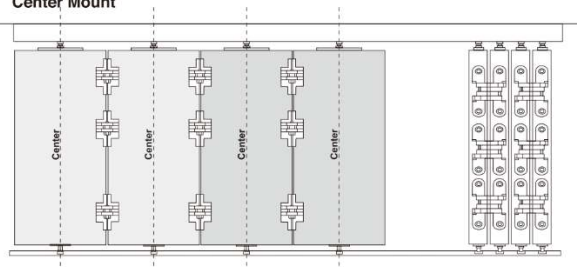

Folding Partition Door

Type : **FDE-200**

**Herculean, Great Product
From Our Bifold Hardware**

Weight: 200 kg/door

Max. Door height: 2400 mm

Min. Door width: 800 mm

Door thickness: 25 - 35 mm


For 2, 4 and 6 doors installation

2 doors system : Max weight 200 kg/door

4 and 6 doors system : Max weight 100 kg/door





Type	Description
FDE200-02	Fitting set for 2 doors, incl. clip hinge
FDE200-04	Fitting set for 4 doors, incl. clip hinge
FDE200-06	Fitting set for 6 doors, incl. clip hinge
FDE200-08	Fitting set for 8 doors, incl. clip hinge
TA200-025	Upper Track Alumunium 2500mm
TA200-035	Upper Track Alumunium 3500mm
UTA200-025	Bottom Track Alumunium 2500mm
UTA200-035	Bottom Track Alumunium 3500mm

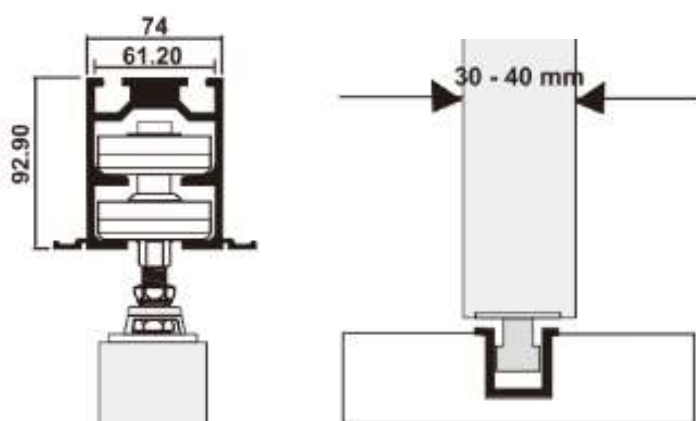


Type: FDE-100		2 doors	4 doors	6 doors	8 doors
	Roller	1 pcs	2 pcs	3 pcs	4 pcs
	Clip hinge	3 pcs	6 pcs	9 pcs	12 pcs
	Pivot upper	1 pcs	1 pcs	1 pcs	1 pcs
	Pivot bottom	1 pcs	1 pcs	1 pcs	1 pcs
	SOSS hinge		3 pcs	9 pcs	12 pcs

Edge Mount

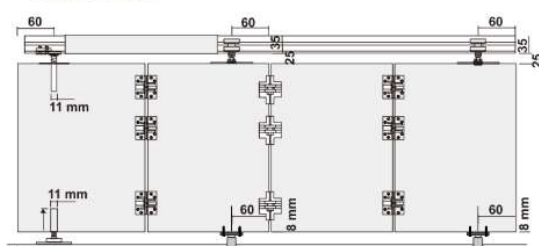

Center Mount

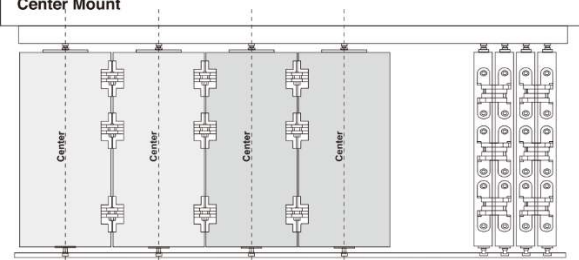




Folding Door For Wardrobe

Type : FD - 001

- For door weight up to 30 kg (60 kg/pair)
- Max door height : 2400 mm
- Door width : Min. 300mm - Max. 500 mm
- Door thickness : 19 – 25 mm
- Vertical adjustment : 1 – 4 mm
- Height adjustment : ± 2 mm
- For wooden and aluminium door
- For folding door free sliding or mounted to carcass at one side with concealed hinges



Type :	Description :
FD - 001	Fitting set one side (2 leaves) include hinge
FD - 002	Fitting set free side (2 leaves) include hinge
FD - 003	Fitting set one side (4 leaves) include hinge
FD - 004	Fitting set free side (4 leaves) include hinge
TFDA - 20	Upper Track Aluminium 2000 mm
TFDA - 30	Upper Track Aluminium 3000 mm
TFDB - 20	Bottom Track Aluminium 2000 mm
TFDB - 30	Bottom Track Aluminium 3000 mm

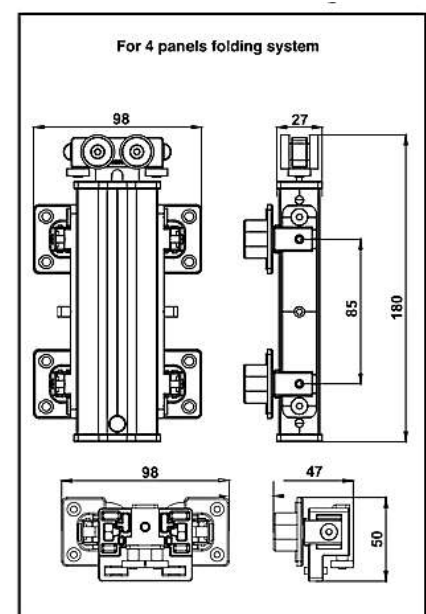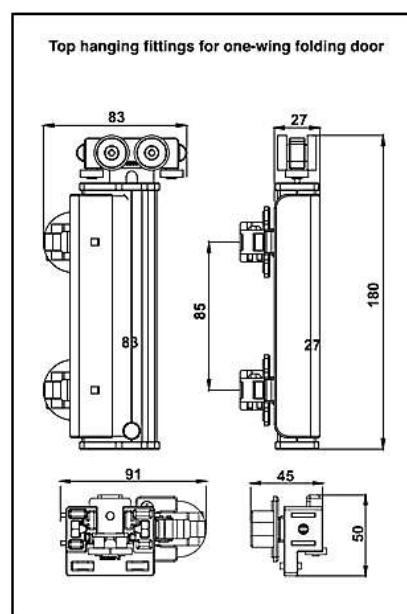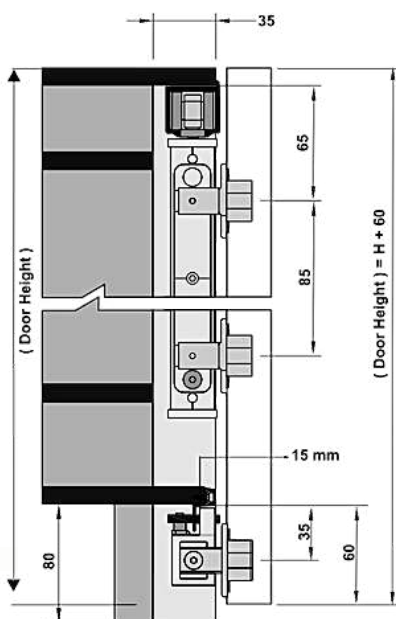

FD - 001



FD - 001 FD - 002



FD - 004






FD - 003

FD - 001

Wardrobe Folding

Type : FD - 008


- Max door weight : 15 - 30 kg/door
- Max door height : 2400 mm
- Cabinet width : 700 - 750 mm
- Fitting folding : 1 pcs
- Folding hinge : 4 pcs
- Cabinet hinge : 4 pcs
- For wooden and aluminium door
- Easy to install

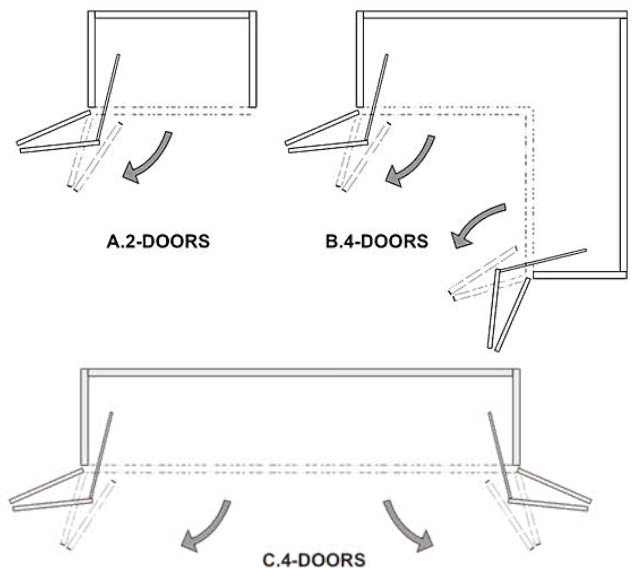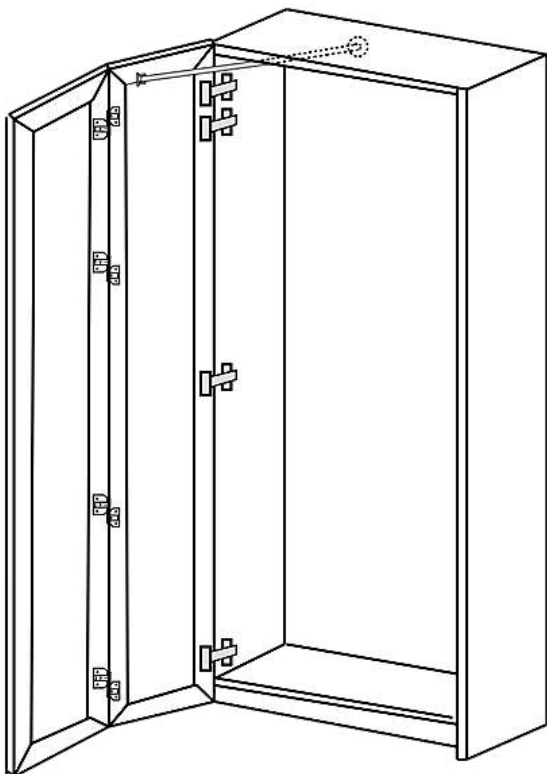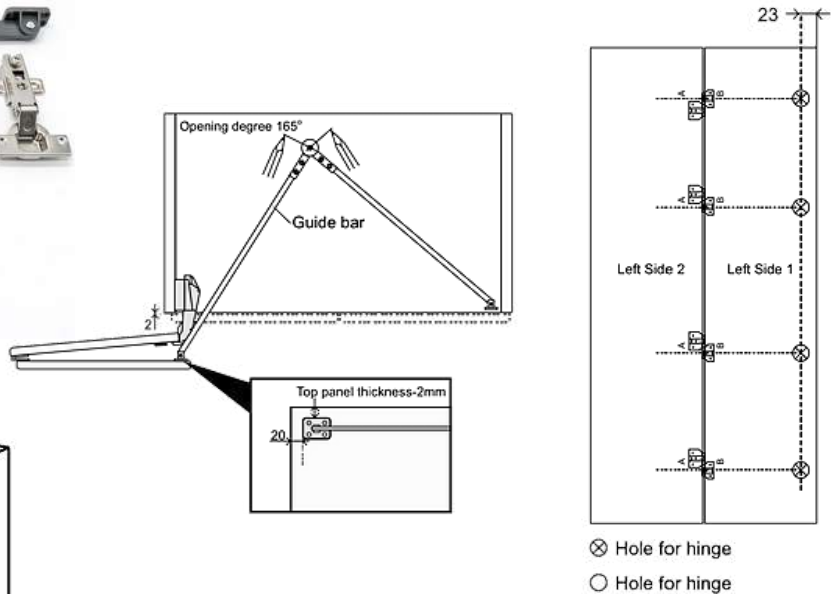

Folding Cabinet

Type : FD-068S

- Max door weight : 30 kg/door
- Max door height : 1500 mm
- Max Cabinet width : 1000 mm
- Fitting folding : 1 pcs
- Folding hinge : 2 pcs
- For wooden and aluminium door
- Easy to install

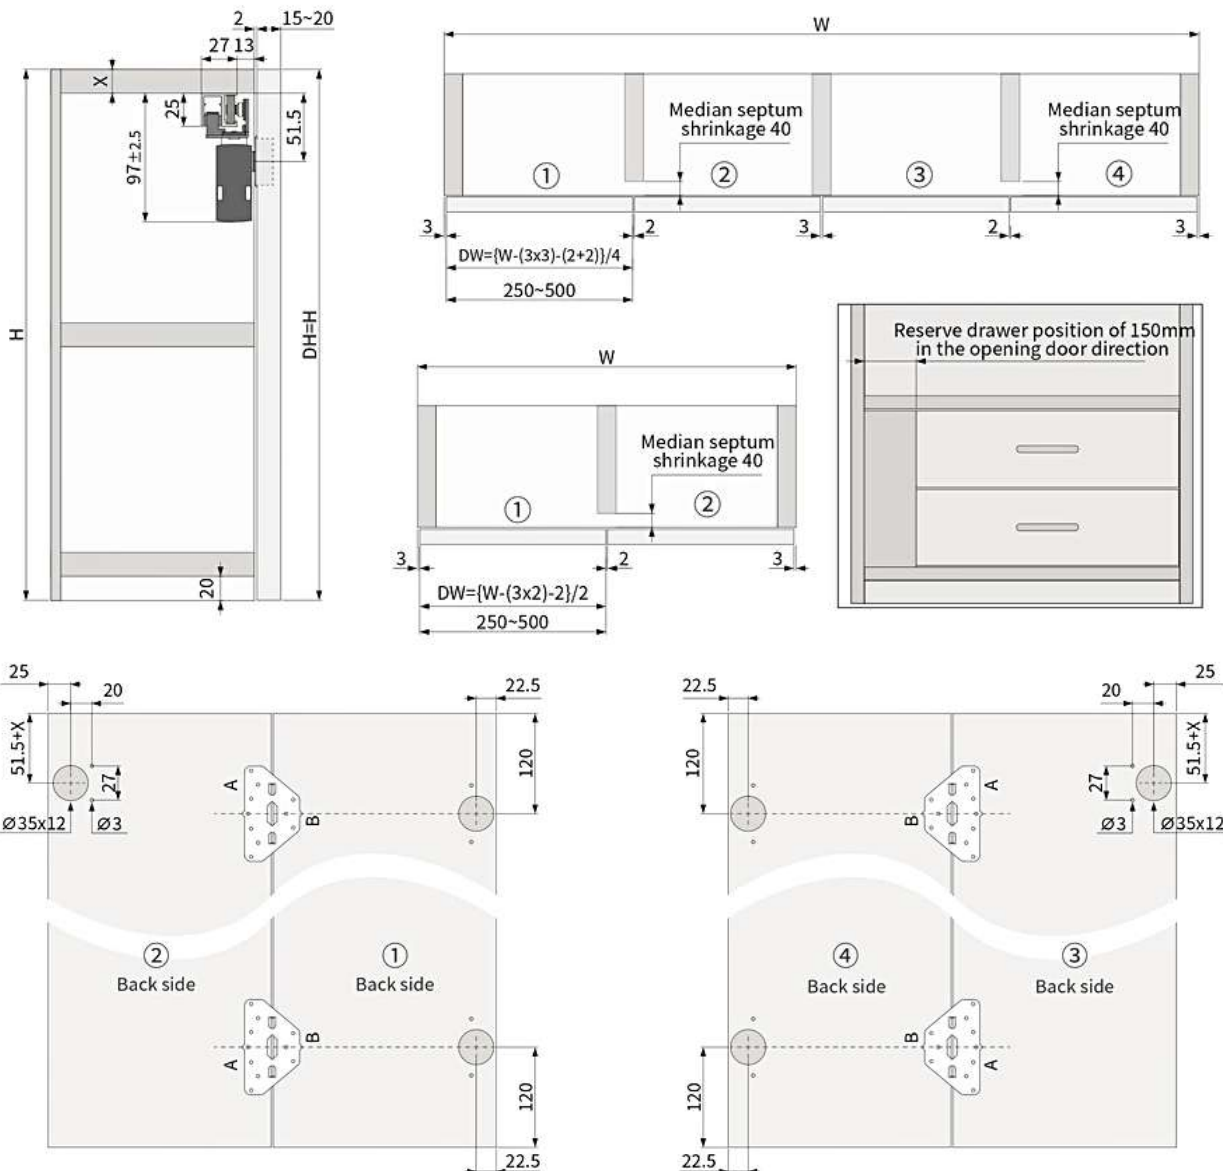

Sliding Wardrobe with Soft Close


Type : SD-032V

- Max door weight : 50 kg/door
- Max door height : 2400 mm
- Min door width : 800 mm
- Door thickness : 18 – 22 mm
- Height adjuster
- Suitable for wooden door & aluminium door




For door thickness max 22mm

With Soft close	Type :	Description :
	SD-032V	Fitting set 2 doors with Softclose
	SD-033V	Fitting set 3 doors with Softclose
	TA - 32T25	Upper and bottom track aluminium 2500 mm
	TA - 32T35	Upper and bottom track aluminium 3500 mm
	SCM-033V	Middle softclose for 3 doors (optional)

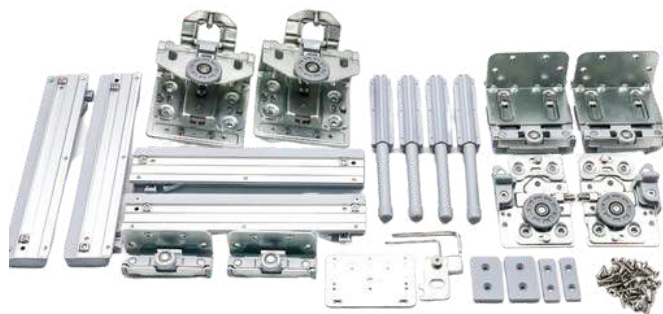

For door thickness max 22mm

Without Soft close	Type :	Description :
	F - 5025	Fitting set 2 doors without Softclose
	F - 5325	Fitting set 3 doors without Softclose
	TA - 32T25	Upper and bottom track aluminium 2500 mm
	TA - 32T35	Upper and bottom track aluminium 3500 mm

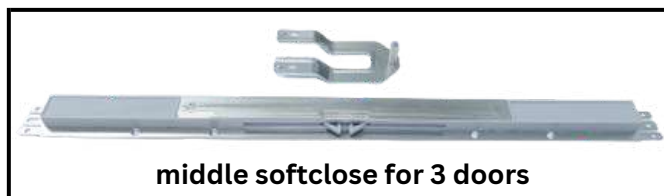

For door thickness max 18mm

Without Soft close	Type :	Description :
	F - 5020	Fitting set 2 doors without Softclose
	F - 5320	Fitting set 3 doors without Softclose
	TA - 32T25	Upper and bottom track aluminium 2500 mm
	TA - 32T35	Upper and bottom track aluminium 3500 mm




With Height



Screw Adjuster



Click On

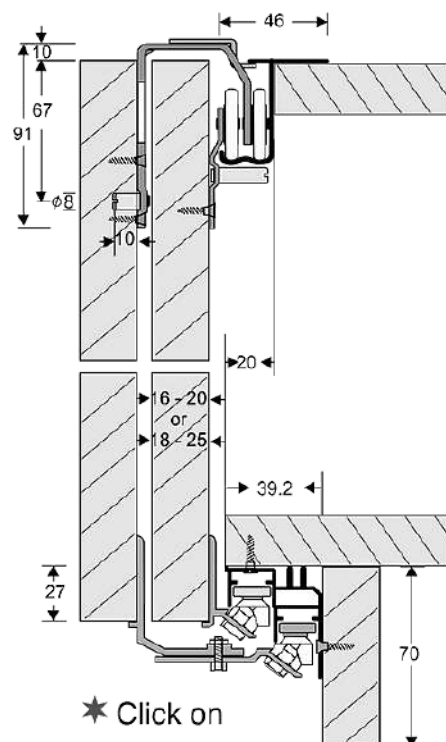

Sliding Wardrobe With Soft Close


Type : K - 70

- Max door weight : 70 kg/door
- Max door height : 2400 mm
- Min door width : 800 mm
- Door thickness : 18 - 30 mm
- Middle door can be sliced to the left and right side with soft close
- Suitable for wooden door & aluminium door

Type :	Description :
K - 70	Fitting set 2 doors with Softclose
K - 73	Fitting set 3 doors with Softclose
TA - 725	Upper and bottom track aluminium 2500 mm
TA - 735	Upper and bottom track aluminium 3500 mm
SC - 037	Middle softclose for 3 doors (optional)




Door Thickness Adjustable

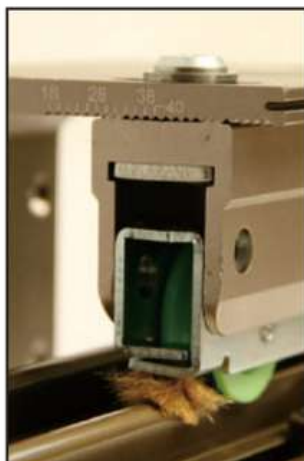

With Brush



Door Height Adjustable

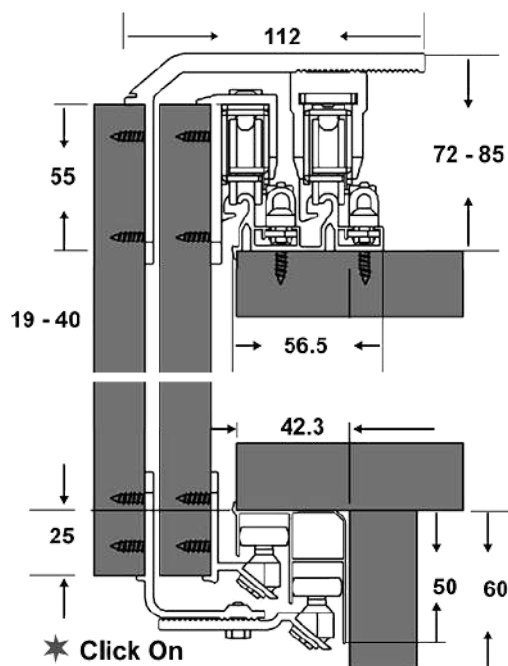

Sliding Wardrobe With Soft Close






Type : SD 050V

- Max door weight : 80 kg/door
- Max door height : 2400 mm
- Min door width : 800 mm
- Door thickness : 18 - 30 mm
- Suitable for wooden door & aluminium door
- With soft close

Type :	Description :
SD-050V	Fitting set 2 doors with Softclose
SD-053V	Fitting set 3 doors with Softclose
TA - 825	Upper and bottom track aluminium 2500 mm
TA - 835	Upper and bottom track aluminium 3500 mm
SCM - 053V	Middle softclose for 3 doors (optional)



Installation Dimension

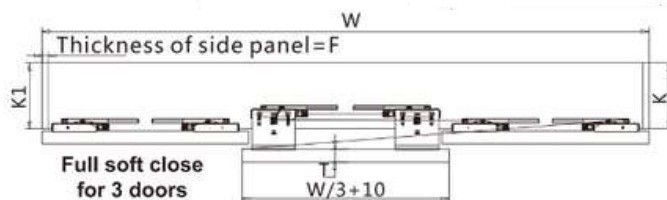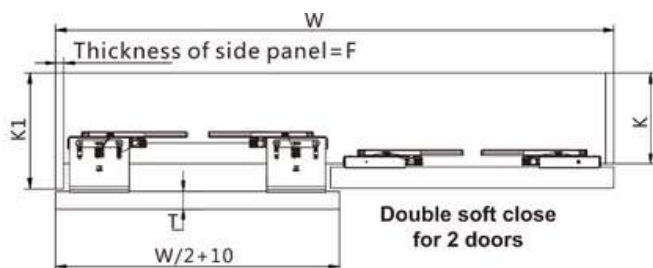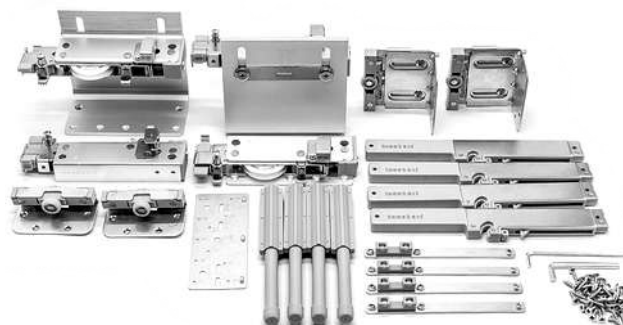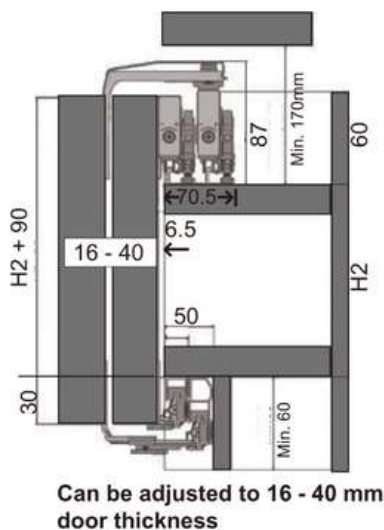

With Brush



With Soft Close



Unlock



lock



Door Height Adjuster



Door Thickness Adjuster

Sliding Wardrobe Inline Electric System with Soft Close

Type : M-35E


- Max door weight : 35 kg/door
- Max door height : 2400 mm
- Min door width : 800 mm
- Door thickness : 18 – 40 mm
- Push to open and with remote control
- High performance in line system
- Suitable for wooden door & aluminium door




Electrical system



Type :	Description :
M35 - 1800	Fitting set door width 900 mm
M35 - 2000	Fitting set door width 1000 mm
M35 - 2200	Fitting set door width 1100 mm
M35 - 2400	Fitting set door width 1200 mm

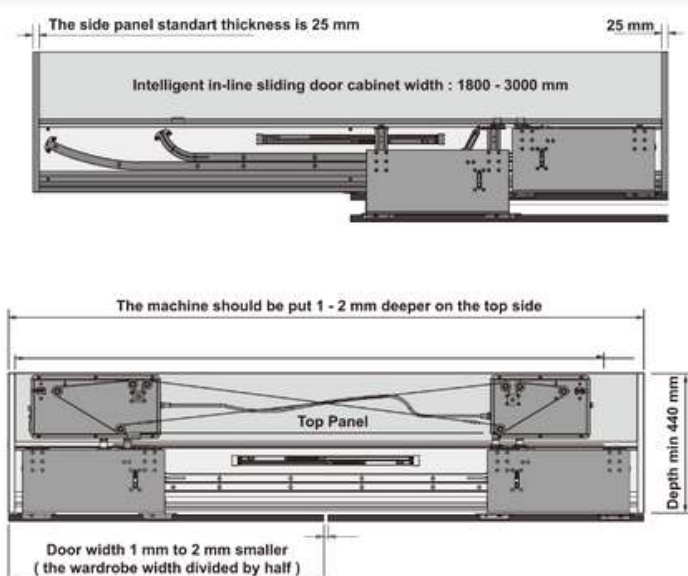

In-line sliding door Installation Requirements

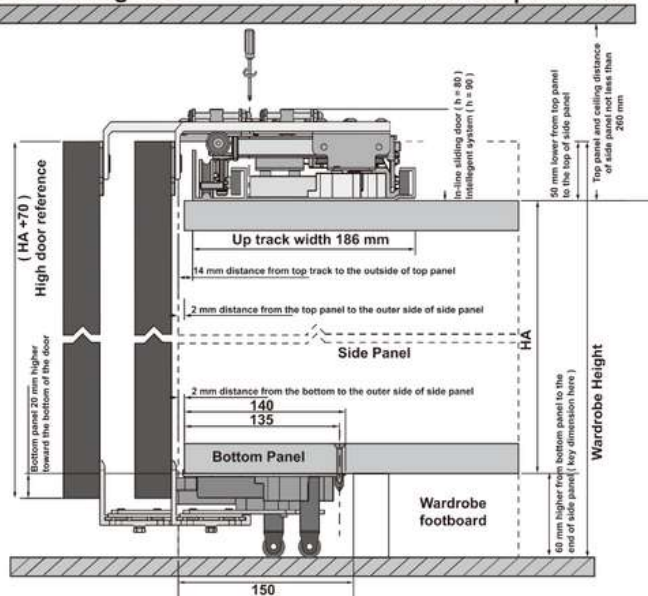

Sliding Wardrobe With Soft Close

In-line system

Type : M - 60


- Max door weight : 60 kg/door
- Max door height : 2600 mm
- Door width : 800 - 1500 mm
- Door thickness : 18 - 40 mm
- Height from floor : 70 mm
- Door vertical adjustment : 4 mm
- Door horizontal adjustment : 3 mm



★ Soft close



Type :	Description :
M - 6025	Fitting set, door width 700 - 1250 mm with track 2500 mm
M - 6030	Fitting set, door width 700 - 1250 mm with track 3000 mm

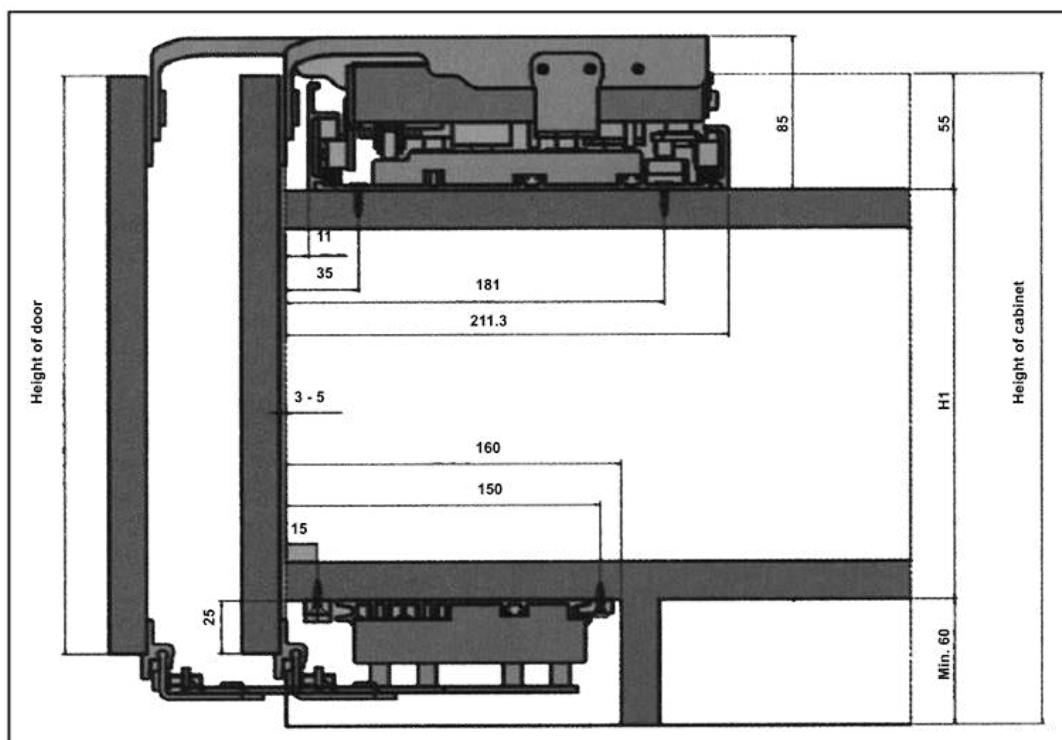

Inline Kitchen Cabinet System

Type : IK


- » Max loading capacity : 15 Kg
- » Door height : 600 - 1000 mm
- » Door width : 700 - 1000 mm
- » Door thickness : 18 - 55 mm
- » For wooden door
- » For aluminium door



Type	Description
V-IK1500	2 doors Inline cabinet kitchen 1500 mm
IK-1600	2 doors Inline cabinet kitchen 1600 mm
IK-1800	2 doors Inline cabinet kitchen 1800 mm
IK-2000	2 doors Inline cabinet kitchen 2000 mm
V-IK2200	2 doors Inline cabinet kitchen 2200 mm

Three patented technology :

1. Damper adjustable device
2. Open shut off two-way damping device
3. Synchronous gear drive device

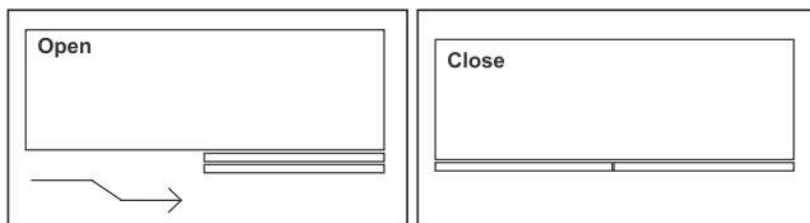

Fantastic Design

Overall surface is the same level when door is closed, elegance, nobility and harmony.

Load-Bearing

High-strength alloys applied to fit;
Metal tracks and multi-roller combination;
max weight 50kg/door.

Two-way Damper Device

The damping force can be adjusted according to the weight of the door during door closing.

Metal Oriented Curved Rail

Alloy-oriented curved rails adopted for effectively reducing friction and noise, ensuring flexibility and smoothness during door sliding.

Sliding Roller


Roller slides more smoothly and quietly, which greatly extends its using life time.

Brush

Automatically clearing debris and dust in the rails, ensuring smooth sliding of roller, protecting from damage and prolonging the service life.

Finishing

Special surface treatment ensures abrasive resistance feature;
Beautiful and dignified appearance;
Suitable for different environment and climate

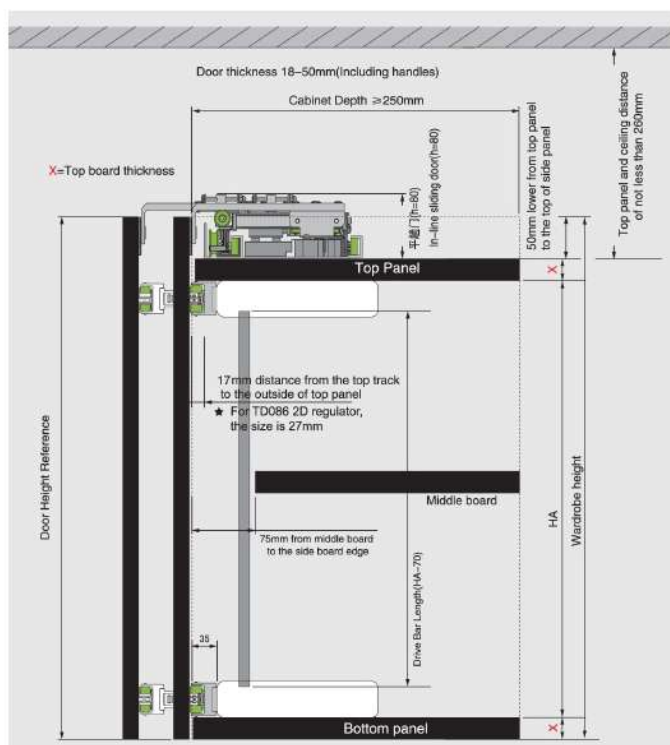

Hanger Lift with Soft Close Smooth and Silent Working



Type: LIFT 1500 W

Load capacity : 12 kg

Wardrobe width : 830-1150 mm

Height : 830 mm

Finishing : white satin powder coated





Type: LIFT 1500 G

Load capacity : 12 kg

Wardrobe width : 830-1150 mm

Height : 830 mm

Finishing : Grey satin powder coated

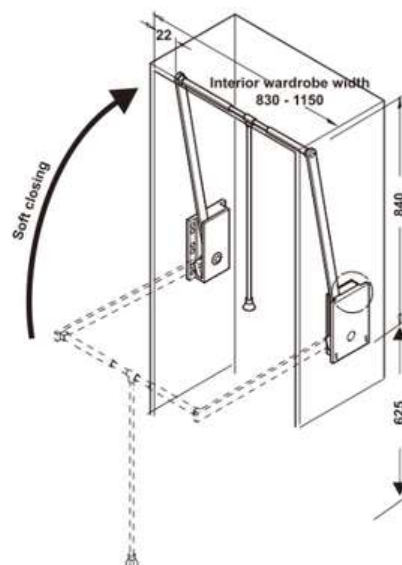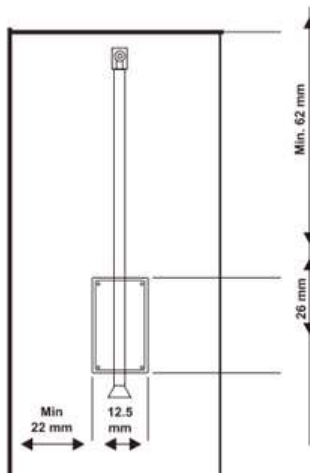

Pull Out Extending Table

Type : TBF-01



Main Features :

This invisible dining table with a length of 2 meters can be unfolded by


- one-way pulling, which is enough for 4-6 family members or friends to
- have dinner together.

All-aluminum alloy metal material, glossy outside.

- It can be used in various application scenarios such as desks and dining tables.
- Invisible guide rails are single-item unfolded, pulling smoothly and
- silently.
- Installation and disassembly are simple and convenient.

Carrying weight: 70kg.

Patented product!

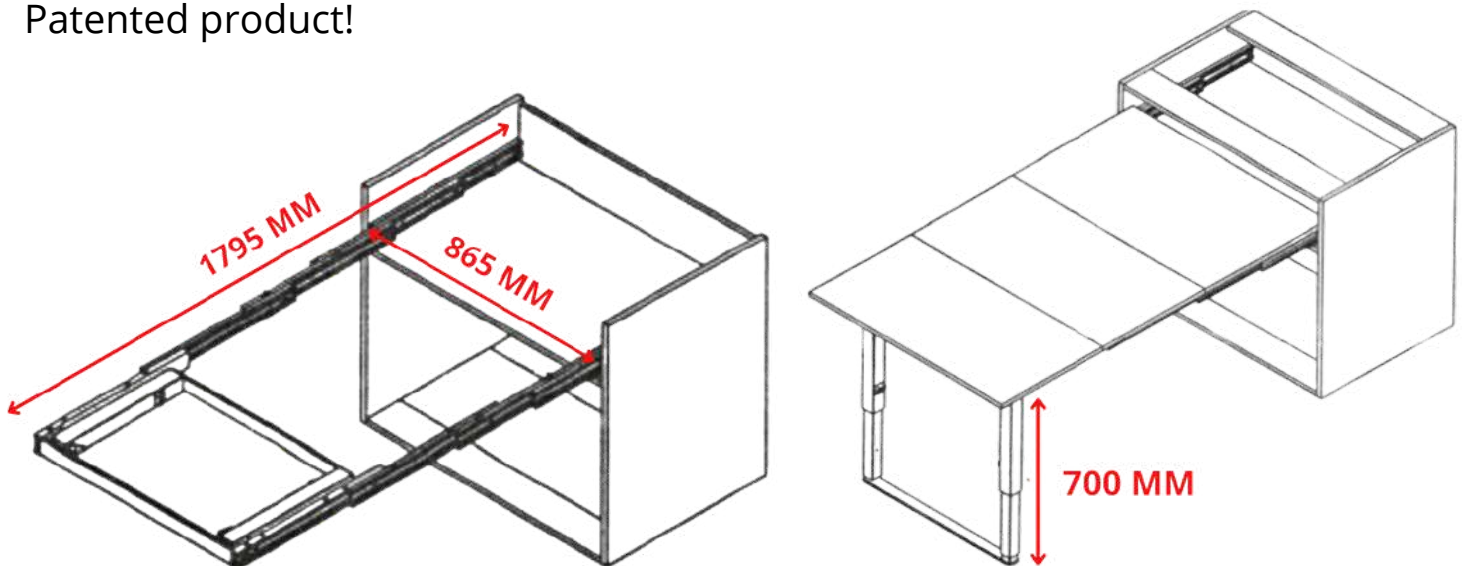


Pull Out Extending Table

Type : TBF-02



143 cm

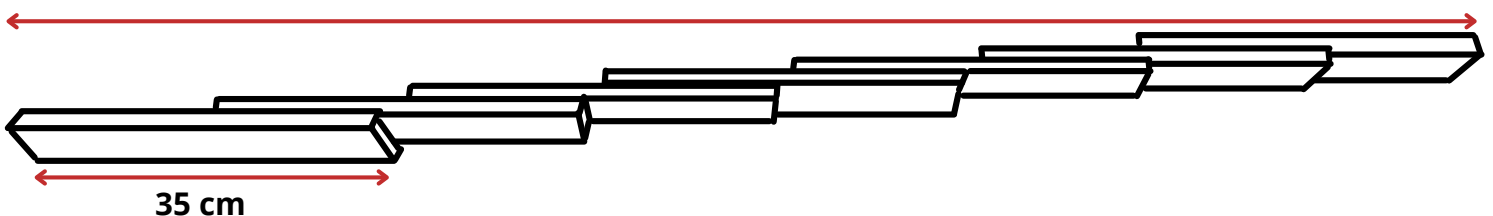

Extending Table

Extending Wall Folding Table

Type : **EXT 02**





- *Color : Black*
- *Capacity : 50 Sets/day*
- *Thickness : 2.0 / 1.0 mm*
- *Function : Convertable*
- *Usage : Transformer Furniture*

Lock System - Screw

- *Comes with two screw-lock system. Prevent sudden movement of the mechanish and cause accidents.*

A3 Carbon Steel-Material

- *Made of high quality A3 Steel, not easy to break and has a stronger durability*
- *Firm and stable, not easy to aging*
- *Abrasion resistance and scratch resistance*

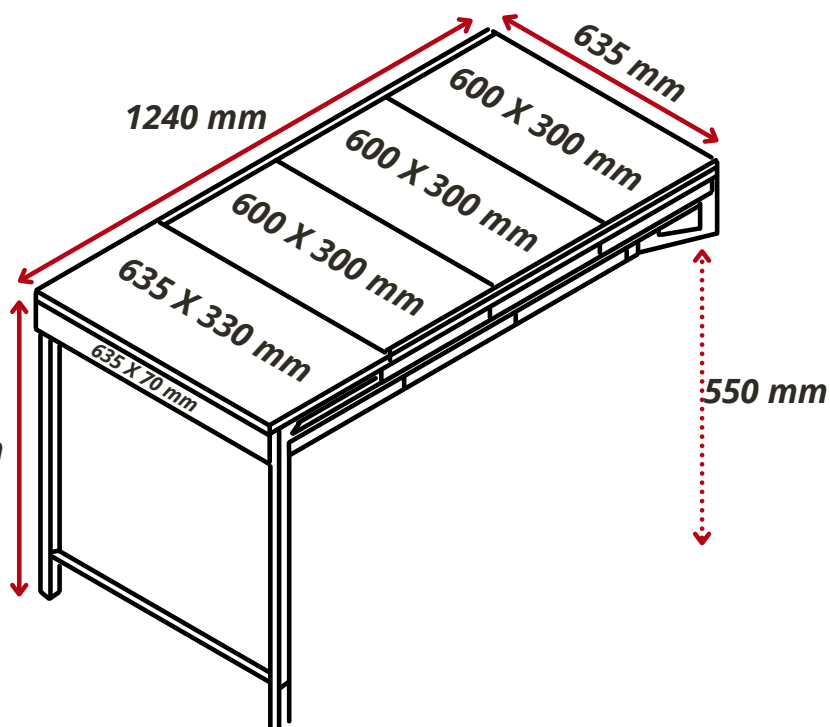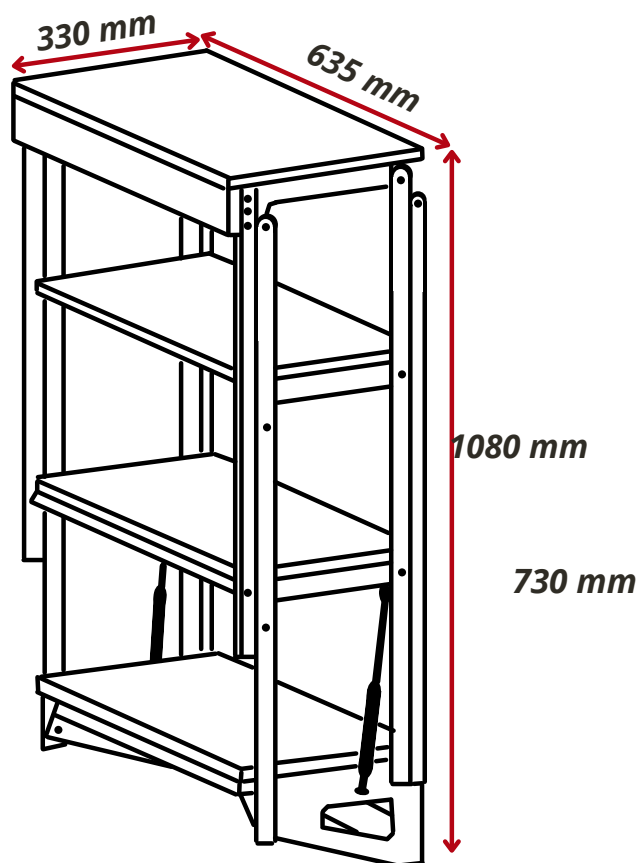

Extending Stand Folding Table

Type : **EXT 03**


- Size : 150cm*95cm*75cm
- Color : Black
- Capacity : 50 Sets/day
- Load : 120 kg
- Thickness : 2.0 / 1.0 mm
- Function : Convertible
- Usage : Transformer Furniture

Lock System - Screw

- Comes with two screw-lock system. Prevent sudden movement of the mechanism and cause accidents.

A3 Carbon Steel-Material

- Made of high quality A3 Steel, not easy to break and has a stronger durability
- Firm and stable, not easy to aging
- Abrasion resistance and scratch resistance

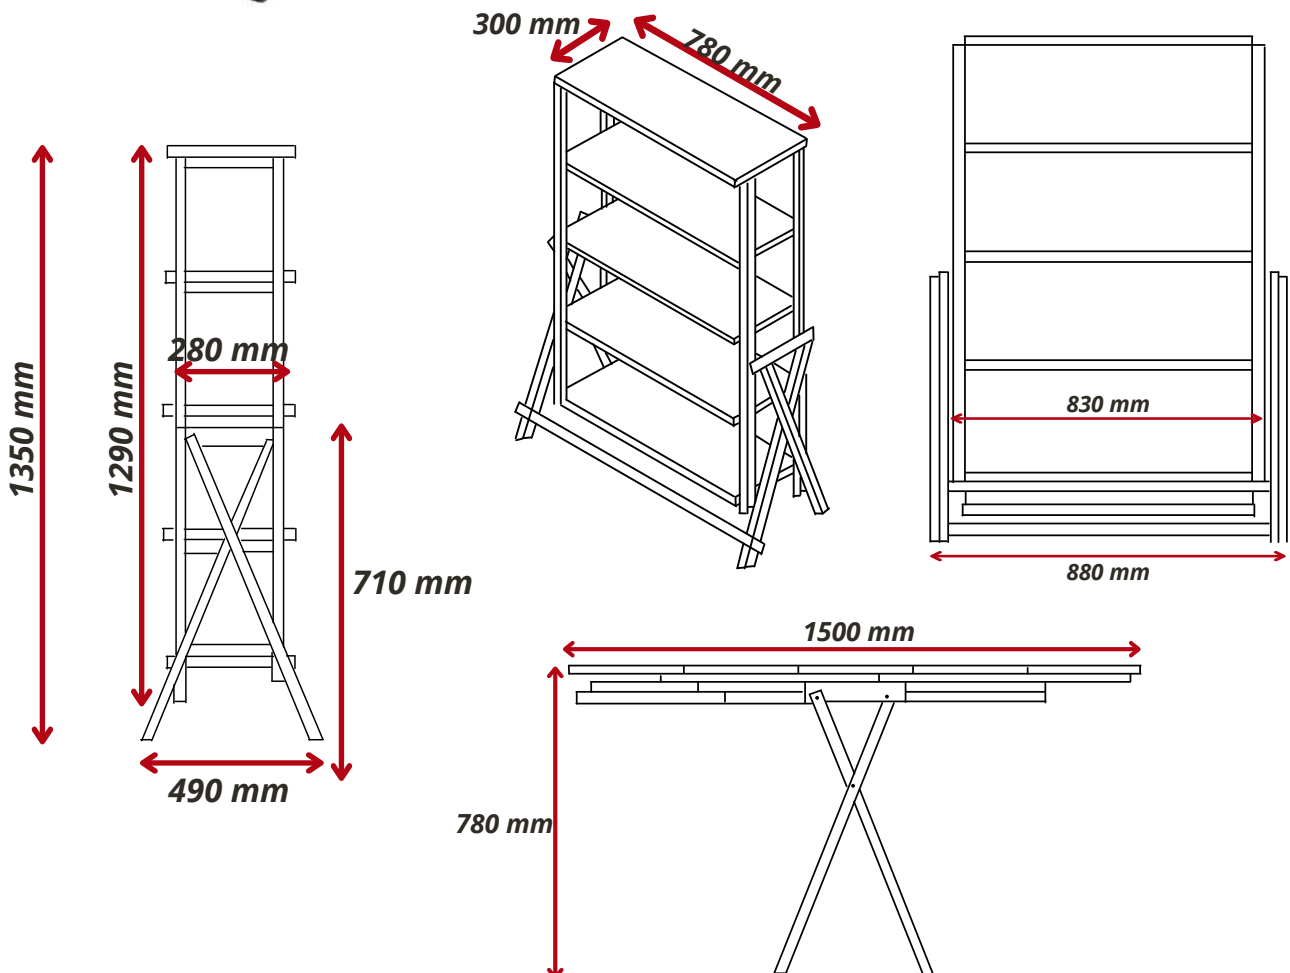

Extending Table


Extending Coffee Table

Multifunction Dining Table


Smart Furniture

Saves Space

Type : **CTB-04**

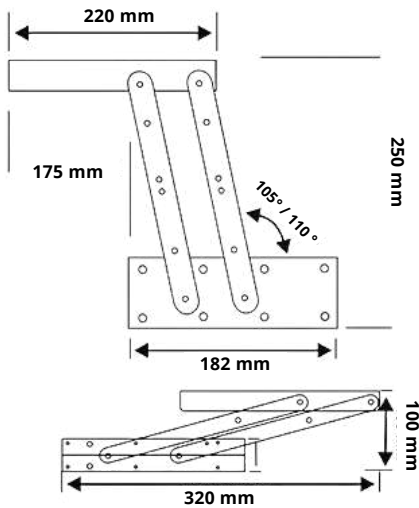

Type : **CTB-09**

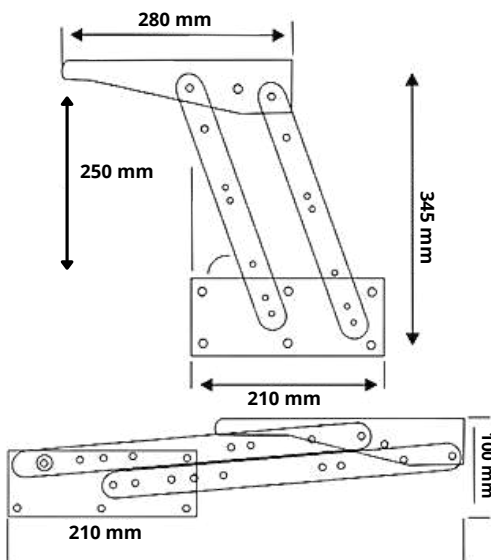


Extending Coffee Table

Multifunction Dining Table


Smart Furniture

Saves Space

Type : **CTB-08 B1**

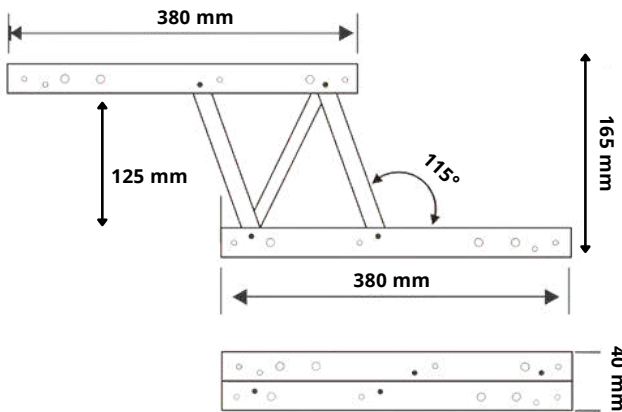

Type : **CTB-08 B2**

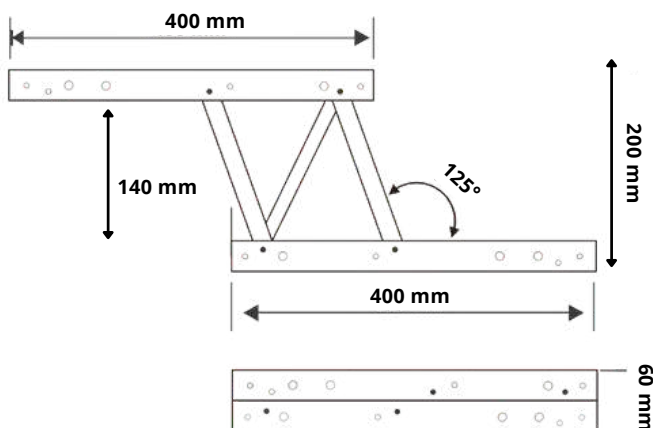

Extending Table


knockers

Extending Coffee Table


Multifunction Dining Table
Smart Furniture
Saves Space



Type : CTB-05 B1

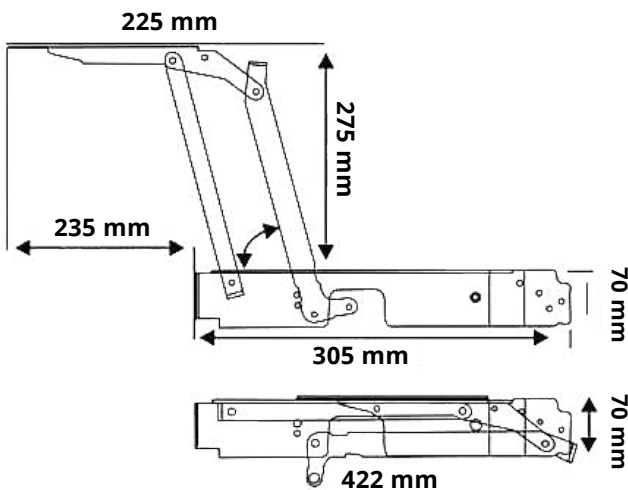

Type : CTB-05 B2

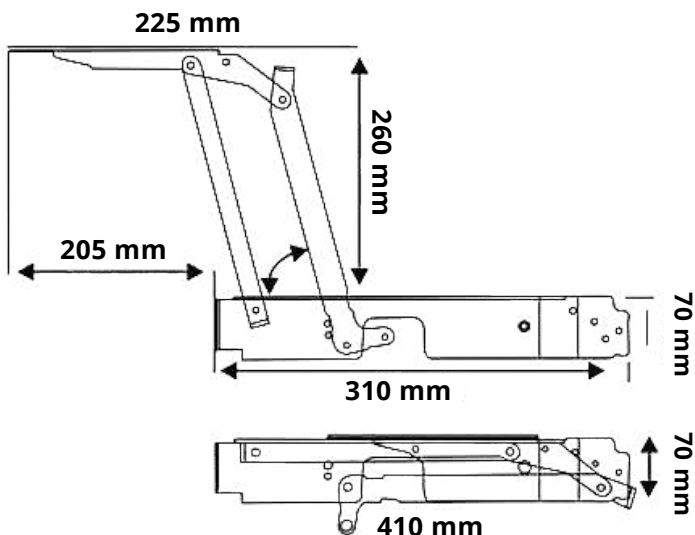

Extending Table


Extending Coffee Table

Multifunction Dining Table

Smart Furniture

Saves Space

Type : **CTB-12 GS**

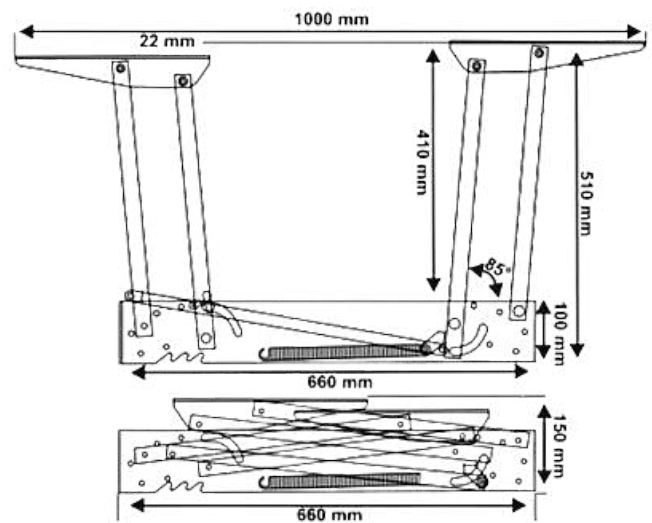

Motorized Table

Single Motor Standing Table

Type : **BNTB 01**

Frame Size : W1100*D520mm

Table Top Size : W1180*D600mm(MAX)*H18mm

Height Range : 770 - 1220mm

Max. Lifting Capacity : 80 kg

Speed : 25mm/s

Frame Color : Black

Carton Size : L1275*W675*H140 mm

Gross Weight : 31.5 kg

Noise : 50 dB

Table foot : 560*70*30 cm



Type : **BNTB 02**

1 Handset: LED display and 4 memory button

2 Feet 700*70mm

2 columns : rectangular column, 2 segment (Outer tube 80*50mm

Frame Height Range : 750 -1250mm

Input : 110-230 V

Frame size : W(1100-1600) D*575mm

Table top size : length : 1100-1600mm, width : 600-800mm

Carton Size : 1080*265*235mm

Duty cycle : 10% ; Max 2 mins on / 18 mins off

Load capacity : 80 kg

speed : 25mm/s

Color : White

With anti-collision function



Hinge - Soft Close Hinge


Push to Open Hinge

Type: PTO


Material : Steel
Finishing : Nickel plated
Opening angle : 110°
Cup diameter : Ø35 mm
Cup depth : 12.5 mm
Fixing door to carcase : Click on
Available type : PTO 01, 02, 03
Rebound sold separately




Click On

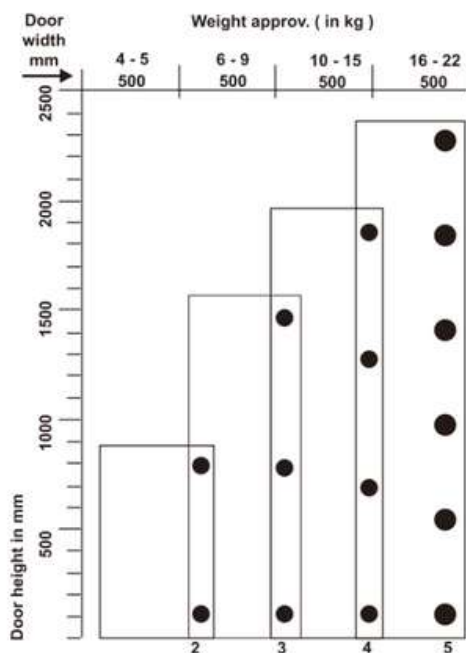

Drilling dimensions for cup fixing screw fixing

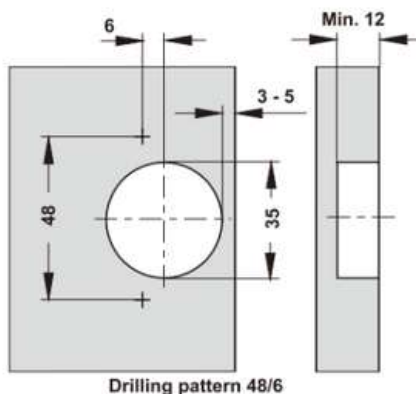

Drilling dimensions for cup fixing

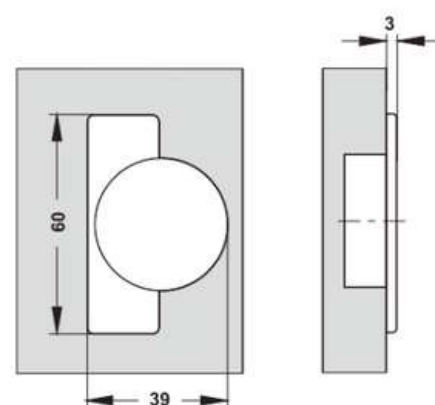




Full overlay / crank 0 mm	Half overlay / crank 9 mm	Insert door / crank 17 mm
Mounting plate distance 13 56.5 18 3 - 7	Mounting plate distance 22.1 56.5 9 3 - 7	Mounting plate distance 30.1 56.5 3 - 6
Type : PTO 01	Type : PTO 02	Type : PTO 03

Hinge - Soft Close Hinge

Glass Soft Closing Hinge

Type: GDH

Material : Cold - rolled steel
Finishing : Nickel
Glass door thickness : 3 mm - 7 mm
Cup diameter : Ø35 mm
Chrome plastic cover up
Passed 75 pounds load test
Passed over 5000 open-close test
Passed salt and mist for over 48 hours
Spring is made of SK-7 carbon steel

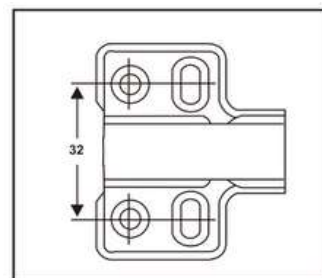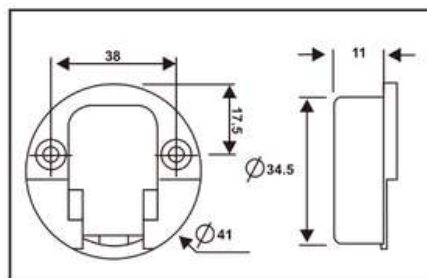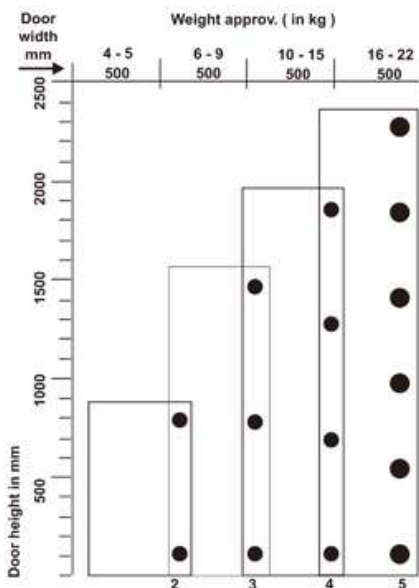

Full overlay / crank 0 mm	Half overlay / crank 9 mm	Insert door / crank 17 mm
Type : GDH 01	Type : GDH 02	Type : GDH 03

Hinge - Soft Close Hinge

Soft Closing Hinge with 72 hours nickel plated

Type: SCHE


Material	: Steel
Steel thickness	: 0.8 x 1.2 x 1.2 mm
Finishing	: Nickel plated
Opening angle	: 110°
Cup diameter	: Ø35 mm
Cup depth	: 12 mm
Max. door width	: 600 mm
Fixing door to carcase	: Click on
Include	: Cover cup, trim cup, and screw




With 10 mm
Width Adjustment



Clip On

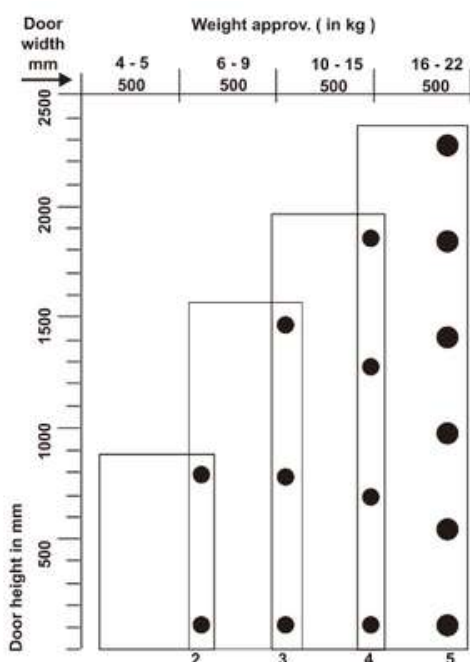


Drilling dimensions for
cup fixing screw fixing

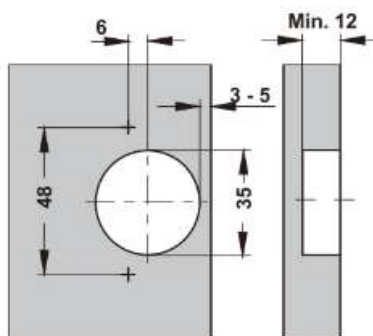

Drilling pattern 48/6

Drilling dimensions for
cup fixing

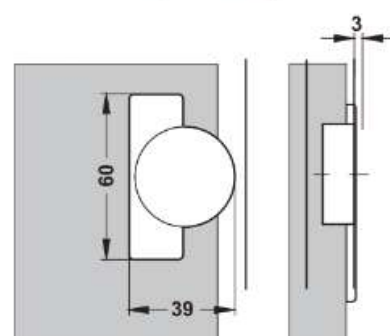

Full overlay / crank 0 mm	Half overlay / crank 9 mm	Insert door / crank 17 mm
Type : SCHE - 01	Type : SCHE - 02	Type : SCHE - 03

Hinge - Soft Close Hinge

Soft Closing Hinge with Acid and Rust Resistance

Type: SCH


Material	: Steel
Steel thickness	: 0.8 - 1.4 mm
Finishing	: Nickel plated
Opening angle	: 110°
Cup diameter	: Ø35 mm
Cup depth	: 12 mm
Max. door width	: 600 mm
Fixing door to carcase	: Click on
Include	: Cover cup, trim cup, and screw




With 10 mm
Width Adjustment



Clip On

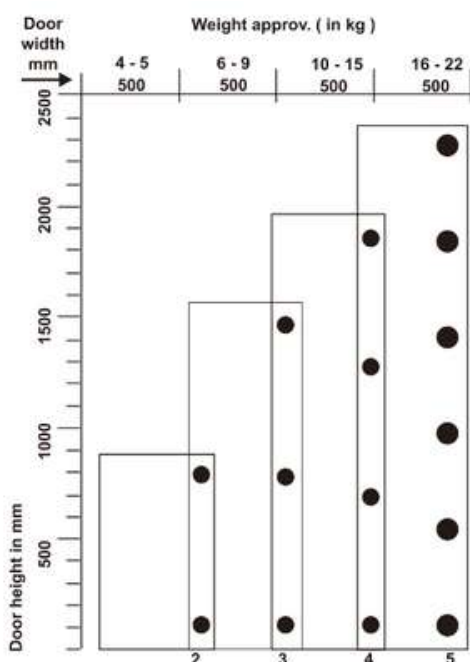


Drilling dimensions for
cup fixing screw fixing

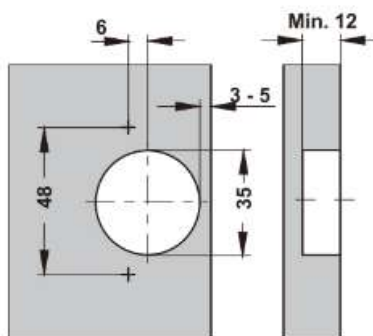

Drilling pattern 48/6

Drilling dimensions for
cup fixing

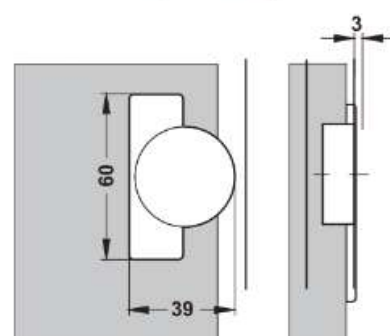

Full overlay / crank 0 mm	Half overlay / crank 9 mm	Insert door / crank 17 mm
Type : SCH - 01	Type : SCH - 02	Type : SCH - 03

Hinge - Soft Close Hinge

Soft Close Concealed Hinge

Type: SCB

Material : Steel

Steel thickness : 0.8 - 1.4 mm

Finishing : Nickel plated


Opening angle : 165°

Cup diameter : Ø35 mm

Cup depth : 12 mm

Max. door width : 600 mm

Fixing door to carcase : Click on

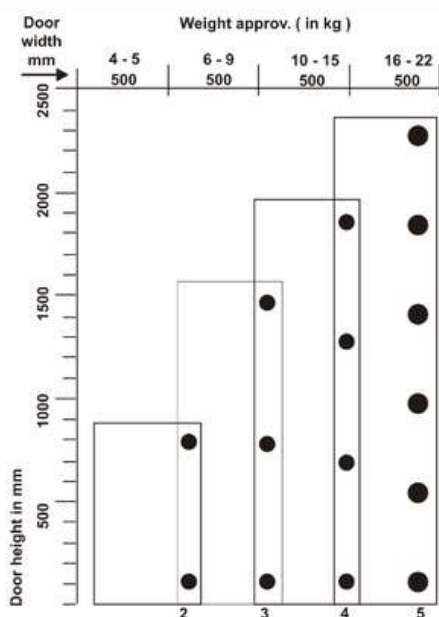


Screw Adjuster




Clip on

Drilling dimensions for cup fixing

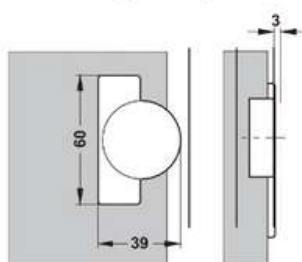

Drilling dimensions for cup fixing screw fixing

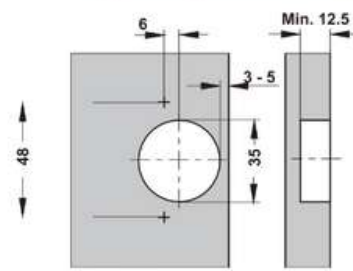

Drilling pattern 48/6

Full overlay / crank 0 mm	Half overlay / crank 9 mm	Insert door / crank 17 mm
Type : SCHB - 01	Type : SCHB - 02	Type : SCHB - 03

Hinge - Soft Close Hinge

Profile Hinge Soft Close

Type: PRH


Material	: Steel
Finishing	: Nickel plated
Opening angle	: 92°
Cup diameter	: Ø40 mm
Cup depth	: 11.5 mm
Cup distance	: 48 mm
Door thickness	: 30 mm
Fixing door to carcase	: Click on




With 10 mm
Width Adjustment




Clip On

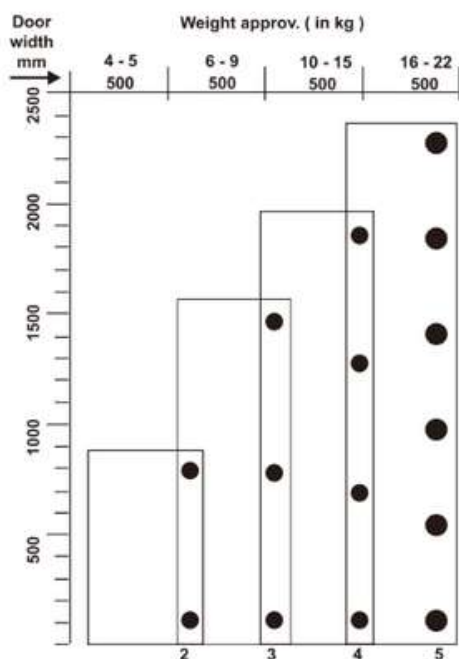

Drilling dimensions for
cup fixing

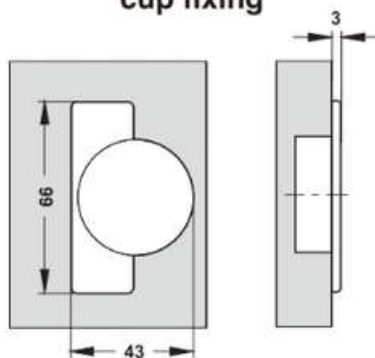

Drilling dimensions for
cup fixing screw fixing

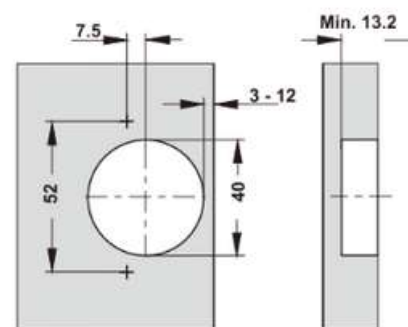

Full overlay / crank 0 mm	Half overlay / crank 9 mm	Insert door / crank 17 mm
Mounting plate distance 13 56.5 3 - 12	Mounting plate distance 22.1 56.5 3 - 12	Mounting plate distance 37.5 56.5 3 - 9
Type : PRH 01	Type : PRH 02	Type : PRH 03

Adjustable Barrel Hinge/ Pivot Hinge For Swing Doors

Type: PH-001



Finishing: Stainless steel



Max. weight: 45 kg

Door width: 600 – 1000 mm

Door height: Max 2400 mm

Door thickness: 25 mm

For wooden swing door

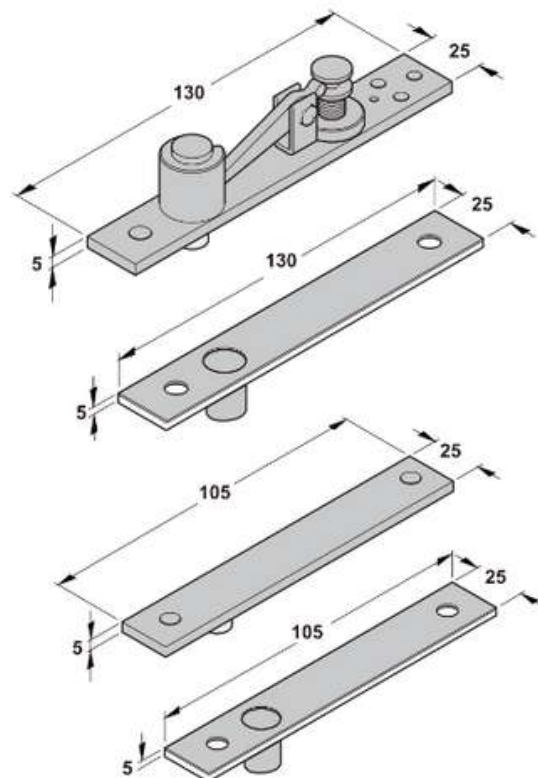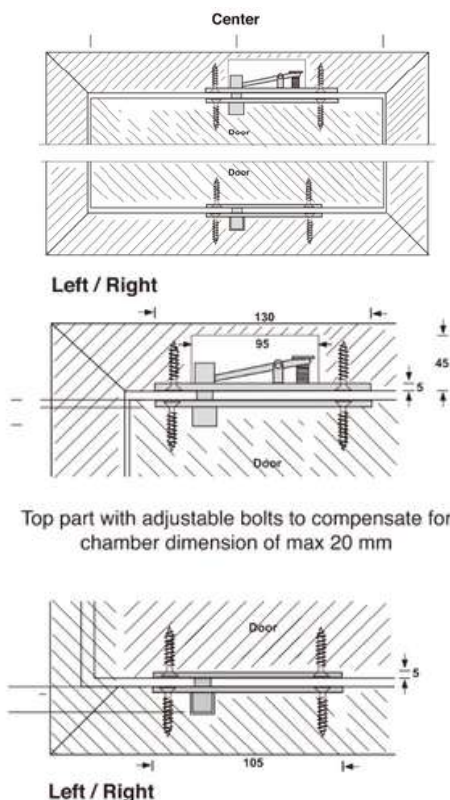

Soft Close Push open

knockers

ONE TOUCH OPENING AND SOFT CLOSING

Type : SC-100

Door width max : 500 mm

Door height max : 2400 mm

Door thickness max : 25 mm

Loading capacity : 22 kg

Push to open and soft closing in one system




Soft Closing




Push To Open

Full Overlay Installation Data	Side panel →	170 101 32 12.5	Top panel
Half Overlay Installation Data	Side panel →	179 110 41 12.5	Top panel
Insert Installation Data	Side panel →	188 119 50 12.5+T	Top panel

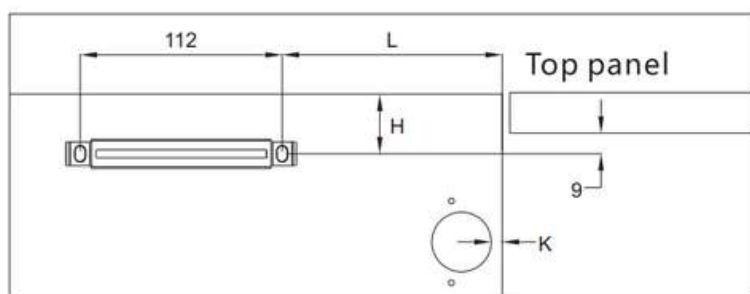

The number of hingeHinge

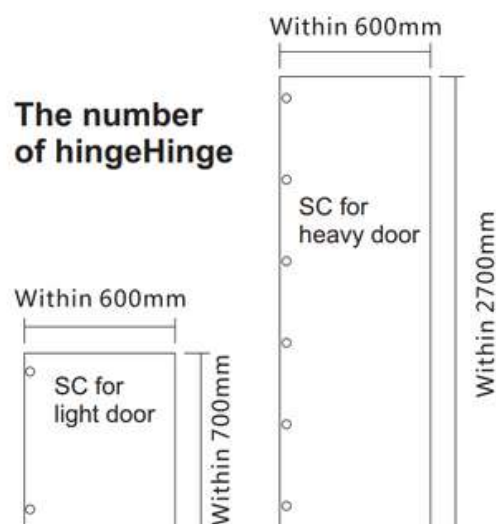


Lift Up System

Gas Spring with Double Soft Close

Type: GS



Type	Weight
GS-80SC	>4 kg
GS-100SC	4 - 6 kg
GS-120SC	6 - 8 kg
GS-150SC	8 - 10kg

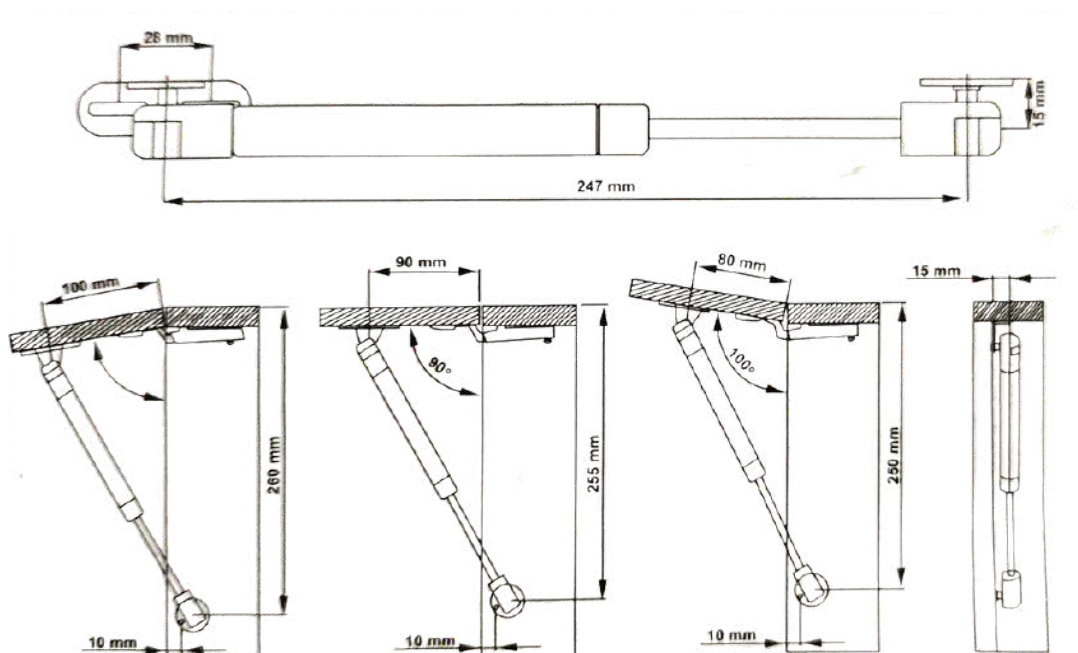

Lift Up System with Double Soft Close

Type: BIFO-125G



Material : Zinc Alloy + Plastic
Max load : Max 10Kg
Cabinet height : 650 - 800 mm
Cabinet width : 800 - 1000 mm
Easy to install and easy to adjust
Suitable for high wall cabinet with 2 larger panels



Type	Weight
BIFO-125G1	6 - 7 Kg
BIFO-125G2	7 - 8 Kg
BIFO-125G3	8 - 9 Kg

Type: LIFT-123G



Material : Zinc Alloy + Plastic
Max load : Max 5Kg
Cabinet height : 300 - 600 mm
Max Cabinet width : 700 mm
Open easily, hover at any angle
Easy to install and disassemble



Type	Weight
LIP-123G1	2.5 - 3.5 Kg
LIP-123G2	3.5 - 4.8 Kg
LIP-123G3	5.0 - 6.0 Kg

Ball Bearing Soft Closing

Type: BBSCB

Side mounted

Full extension

32 mm system hole

Non-handed

Lever disconnect (released by Trigger)

Material : Steel


Finish : Black Powder Coated

Load : 45 Kg

Material Thickness : 1.5 x 1.4 x 1.2 mm



Type	Description
BBSCB - 300	Ball bearing slide, full ext. 300 Black Powder coated
BBSCB - 350	Ball bearing slide, full ext. 350 Black Powder coated
BBSCB - 400	Ball bearing slide, full ext. 400 Black Powder coated
BBSCB - 450	Ball bearing slide, full ext. 450 Black Powder coated
BBSCB - 500	Ball bearing slide, full ext. 500 Black Powder coated
BBSCB - 550	Ball bearing slide, full ext. 550 Black Powder coated

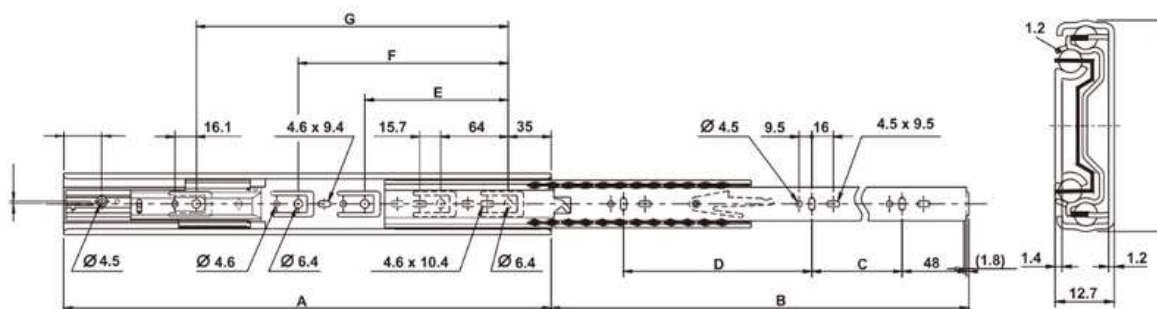

**Active Motion
Technology**



**Double Spring
Smooth & Stable**



**Steel Pattern
Plate**



**Thickness
1.2 x 1.2 x 1.5**



**Lever
Disconnect**

Ball Bearing Push Open Soft Closing

Type: BBPTSC

Side mounted

Full extension

32 mm system hole

Non-handed

Lever disconnect (released by Trigger)

Material : Steel


Finish : Black Powder Coated

Load : 45 Kg

Material Thickness : 1.5 x 1.4 x 1.2 mm



Type	Description (With Stabilizer)
BBPTSC - 300	Ball bearing slide, push to open, full ext. 300 Black Powder coated
BBPTSC - 350	Ball bearing slide, push to open, full ext. 350 Black Powder coated
BBPTSC - 400	Ball bearing slide, push to open, full ext. 400 Black Powder coated
BBPTSC - 450	Ball bearing slide, push to open, full ext. 450 Black Powder coated
BBPTSC - 500	Ball bearing slide, push to open, full ext. 500 Black Powder coated
BBPTSC - 550	Ball bearing slide, push to open, full ext. 550 Black Powder coated

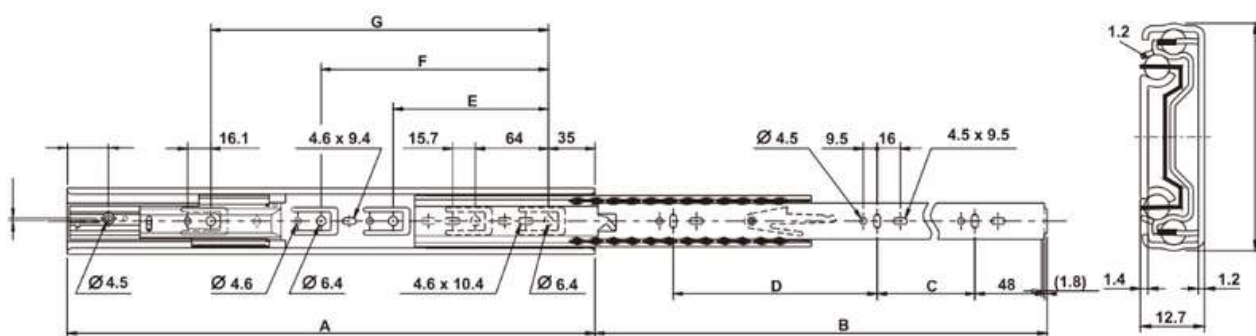

**Active Motion
Technology**



**Double Spring
Smooth & Stable**



**Steel Pattern
Plate**



**Thickness
1.2 x 1.2 x 1.5**



**Lever
Disconnect**

Ball Bearing Push to Open with Stabilizer

Type: BBPTSB

Side mounted

Full extension

32 mm system hole

Non-handed

Lever disconnect

Material : Steel

Finish : Black Powder Coated

Load : 45 Kg

Material Thickness : 1.5 x 1.4 x 1.2 mm



Type	Description (With Stabilizer)
BBPTS - 300	Ball bearing slide, push to open, full ext. 300 Black Powder coated
BBPTS - 350	Ball bearing slide, push to open, full ext. 350 Black Powder coated
BBPTS - 400	Ball bearing slide, push to open, full ext. 400 Black Powder coated
BBPTS- 450	Ball bearing slide, push to open, full ext. 450 Black Powder coated
BBPTS - 500	Ball bearing slide, push to open, full ext. 500 Black Powder coated
BBPTS - 550	Ball bearing slide, push to open, full ext. 550 Black Powder coated



Durable



5 Step Closing



Stronger Clip



Material Thickness :
1.5 x 1.4 x 1.2 mm



High Performance



Push to Open

Undermount Slide Drawer Rail

Type : TSMF & TSMS

Loading Capacity 40 kg

Soft Close-force Adjustable


3D locking devices

High quality steel material



Tandem, soft closing-full extension


Type	Description
TSMF - 300 mm	Tandem, slow motion, full ext. 300 mm
TSMF - 350 mm	Tandem, slow motion, full ext. 350 mm
TSMF - 400 mm	Tandem, slow motion, full ext. 400 mm
TSMF - 450 mm	Tandem, slow motion, full ext. 450 mm
TSMF - 500 mm	Tandem, slow motion, full ext. 500 mm
TSMF - 550 mm	Tandem, slow motion, full ext. 550 mm

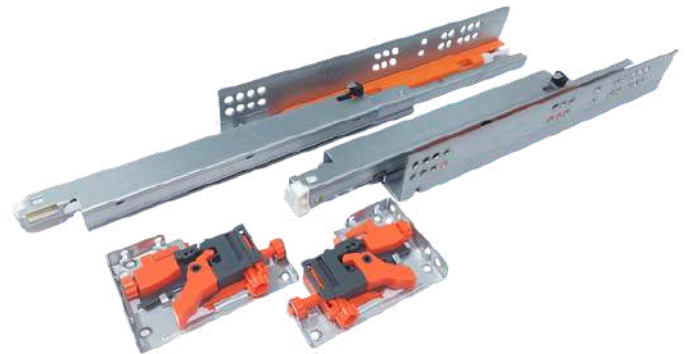

Tandem, soft closing-single extension

Type	Description
TSMS - 300 mm	Tandem, slow motion, single ext. 300 mm
TSMS - 350 mm	Tandem, slow motion, single ext. 350 mm
TSMS - 400 mm	Tandem, slow motion, single ext. 400 mm
TSMS - 450 mm	Tandem, slow motion, single ext. 450 mm
TSMS - 500 mm	Tandem, slow motion, single ext. 500 mm
TSMS - 550 mm	Tandem, slow motion, single ext. 550 mm

Runner Length	Drawer Length	Loading kg/prs	Max. Width	Min. Internal Depth
300 mm	290 mm	40 kg	500 mm	290 mm
350 mm	340 mm	40 kg	550 mm	360 mm
400 mm	390 mm	40 kg	600 mm	410 mm
450 mm	440 mm	40 kg	650 mm	460 mm
500 mm	490 mm	40 kg	700 mm	510 mm

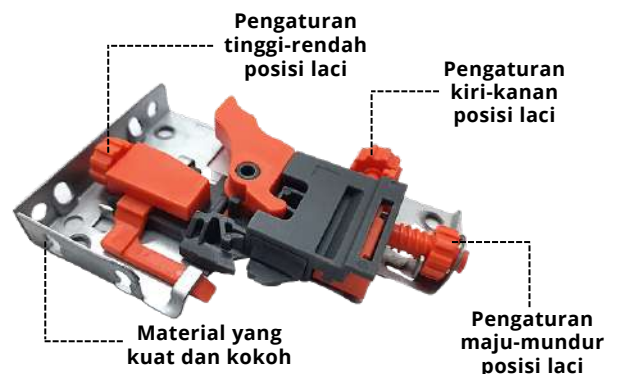

Flexibel 3D Clip




**Telescopic System
Smooth and Stable**



**Softclose Load
Adjustment**



**Thick and Strong
Material**

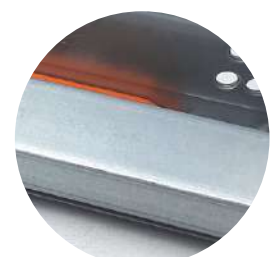



**Coated Coating for
Rust Resistant**

Undermount Slide Drawer Rail

Modern 3D Adjustment



Type : EXTREME

Full extension
2 spring soft close mechanism
3D locking devices
Material thickness 1.0 / 1.5 / 1.8 mm
High quality steel material
For heavy duty (Load Capacity 50kg)

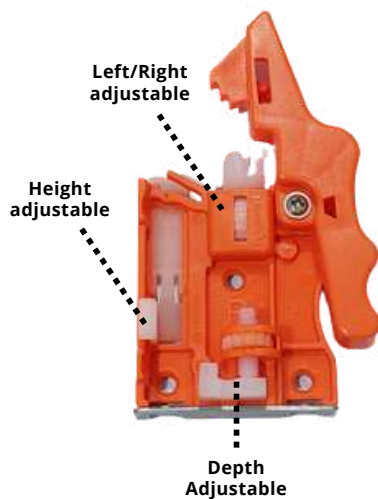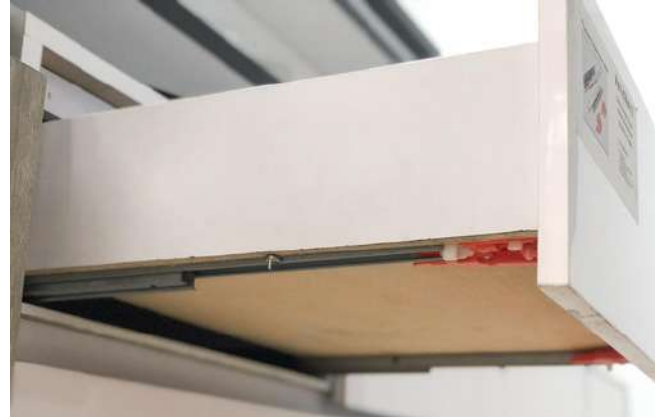

3D adjustment :

1. Adjustable to right and left position
2. Adjustable to up and down position
3. Adjustable to back and front position

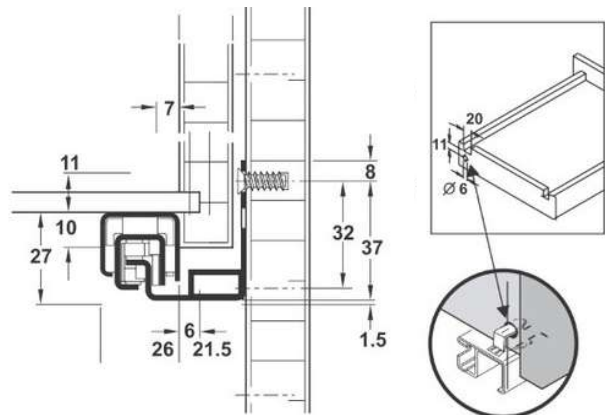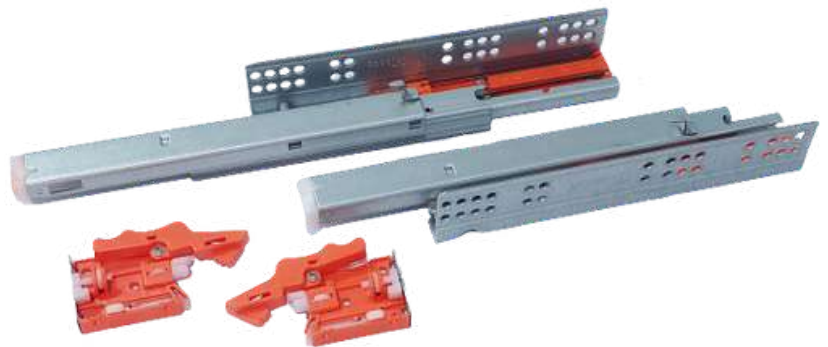

Undermount Slide.Smooth and high grade material . 3D System and Soft Closing

Type	Description	Runner Length	Load kg/prs	Meas
Extreme - 300 mm	Undermount Slide, full ext. 300 mm	300 mm	40 kg	37.5 x 31 x 13.5 cm
Extreme - 350 mm	Undermount Slide, full ext. 350 mm	350 mm	40 kg	42.5 x 31 x 13.5 cm
Extreme - 400 mm	Undermount Slide, full ext. 400 mm	400 mm	40 kg	47.5 x 31 x 13.5 cm
Extreme - 450 mm	Undermount Slide, full ext. 450 mm	450 mm	40 kg	52.5 x 31 x 13.5 cm
Extreme - 500 mm	Undermount Slide, full ext. 500 mm	500 mm	40 kg	57.5 x 31 x 13.5 cm
Extreme - 550 mm	Undermount Slide, full ext. 550 mm	550 mm	40 kg	62.5 x 31 x 13.5 cm

Bed - Hidden Wall Bed



Hidden Wall Bed

Convenience to use
and save your room space

Mattress Thickness : 25 cm

Mattress Load : 25kg

Available size:

90 x 200
120 x 200
150 x 200
160 x 200
180 x 200

Available type:

Horizontal / Vertical
Front / Side handle
HWB / JHWB
Manual / Electric
HWB / +Sofa / +Table



Type	Description
HWB 90 V/H	Wall Bed 90x200, Vertical / Horizontal
HWB 120 V/H	Wall Bed 120x200, Vertical / Horizontal
HWB 150 V/H	Wall Bed 150x200, Vertical / Horizontal
HWB 160 V/H	Wall Bed 160x200, Vertical / Horizontal
HWB 180 V/H	Wall Bed 180x200, Vertical / Horizontal



Type	Description
HWB 90V Table	Vertical Bed 90x200 mm with accs.table
HWB 120V Table	Vertical Bed 120x200 mm with accs.table
HWB 150V Table	Vertical Bed 150x200 mm with accs.table
HWB 160V Table	Vertical Bed 160x200 mm with accs.table



Type	Description
HWB 90V Sofa	Vertical Bed 90x200 mm with accs.sofa
HWB 120V Sofa	Vertical Bed 120x200 mm with accs.sofa
HWB 150V Sofa	Vertical Bed 150x200 mm with accs.sofa
HWB 160V Sofa	Vertical Bed 160x200 mm with accs.sofa

Hidden Wall Bed

Electric / motorized (HWP-E)

With remote control to easier to use
Convenience to use and save your room space





Type	Description
HWP 120E	Vertical 1200 mm with remote control
HWP 150E	Vertical 1500 mm with remote control

Hidden Wall Bed

with Frame (J-HWP)

Can be assembled without a cabinet board, more flexible, convenience to use and save your room space

Type	Description
JHWP 160V	Vertical 1600 mm with wall mounting frame
JHWP 180V	Vertical 1800 mm with wall mounting frame

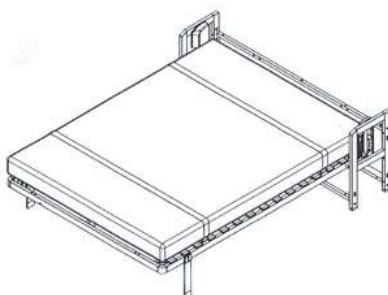

Study Desk

Type: STD-2000

A Comfortable Study Desk & Bed System
Practical & Convenient for Anyone to Use



For Mattress :

- 900 x 2000 (1200 N)
- 1000 x 2000 (1300 N)
- 1200 x 2000 (1500 N)

Ideal for :

- Small space
- Kids room
- Student housing
- Condominiums
- Occasional guest room
- etc

TV Lift System

TV Lift System

TV Lift system to trust when it comes to quality and safety for your home


Made for flat screen, LCD, or plasma televisions.

With remote control (4 memories setting) and anti collision for safety and easier use

Type: KF-280

Built-in safety features

- Close position overall dimensions :
= 700 wide x 12 deep x 720 high
- Open position overall dimensions :
700 wide x 12 deep x 1310 high
- Travel distance : 560 mm
- Travel time : 32 - 40 sec

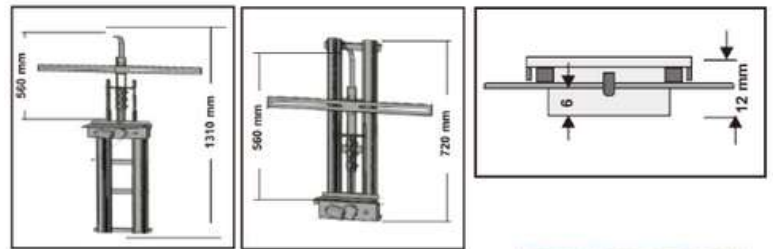

Type: TVL-BNM

Built-in safety features

- Shortest / Close position
= 570 mm
- Highest / Open position
= 1220 mm
- TV Capacity
= 32 - 57 inch (-+ 50kg)
- Material
= Steel, Powder coated



Type: TVL-BNL

Built-in safety features

- Shortest / Close position
= 720 mm
- Highest / Open position
= 1651 mm
- TV Capacity
= 42 - 70 inch (-+ 50kg)
- Material
= Steel, Powder coated



Digital Electronic Touch Screen Safety Box With Three Extension Ball Bearing Slide

- Convenience with emergency lock
- With high-quality coefficient round lock
- If the battery runs out, you can use USB power charger to turn it on
- 1.5 mm thickness material steel
- Quiet, smooth and high quality



Type	Weight	Description
DB-50	480 x 400 x 150 mm	Numeric code
DB-60	580 x 400 x 150 mm	Numeric code
DB-50FP	480 x 400 x 150 mm	Numeric code + Fingerprint
DB-60FP	580 x 400 x 150 mm	Numeric code + Fingerprint



**Tempered Glass
Touch Screen**

» Use mirrors tempered
glass with edging




**With Spare Key and USB
Power Plug Beside**



Smart Combination Lock



Smart and keyless
Easy installation
Override code available
Automatically motorized mechanism
Biometric fingerprint lock
Can be add 20 fingerprint
4-10 digit PIN code



Password



Fingerprint



Sensitive



Widely used



Low Power



F023



F029



F053



F022



F050



F020



F033



F040







F043

The Prestige Lock With Perfect Key Furniture Lock With Flexy Key

- » Master key
- » Removal key
- » 3000 circle

Lock - System 3000

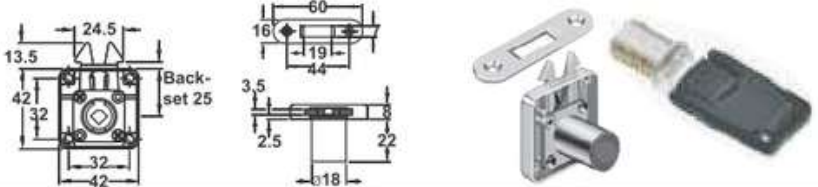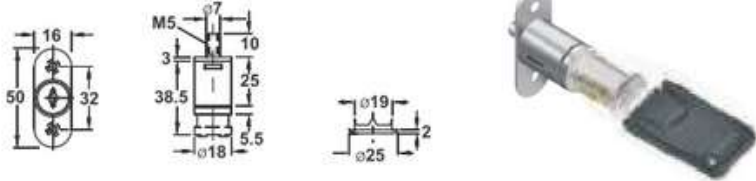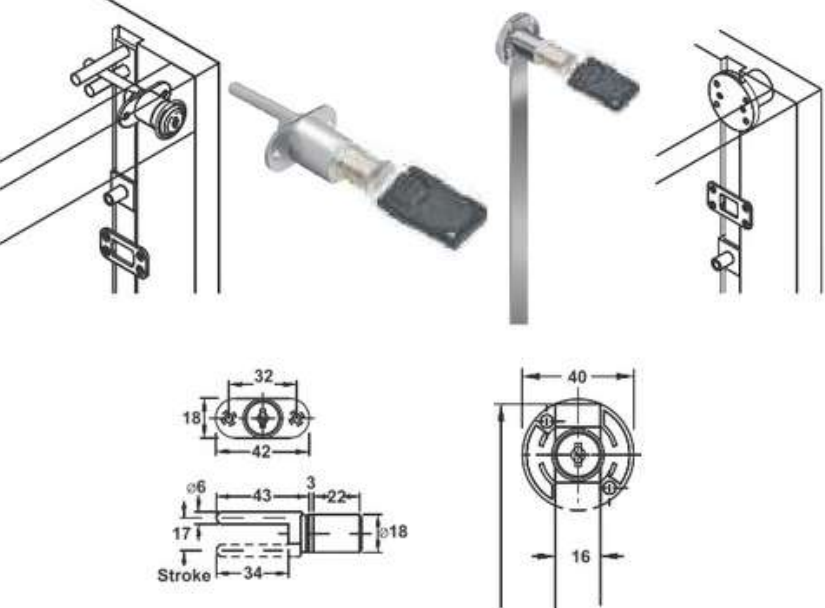Espangolett lock (Incl. profile rod 1.3 x 2 pcs, ACC) 22 mm : KEK - 22 26 mm : KEK - 26 32 mm : KEK - 32	
Roller shutter : KRS	
Push lock : KPL	
Cam lock : KCL	
Side panel lock 600 mm : KCS - 600 Side panel lock 1200 mm : KCS - 1200 Front panel lock 600 mm : KCD - 600 Front panel lock 1200 mm : KCD - 1200	
Master key : MK - 01 Removal key : RK - 01	

Furniture Lock - Drawer Lock


knockers

The Prestige Lock with Perfect Key Drawer Lock with Flexy Key




Flexy Key

Type : **KLE - 022**

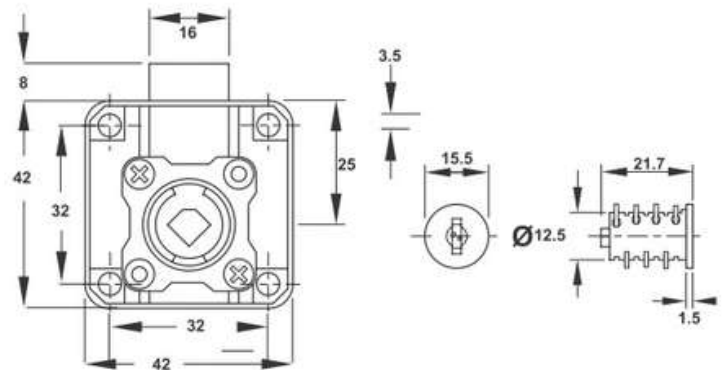

Drawer lock
Master key
Removal key
3000 circle

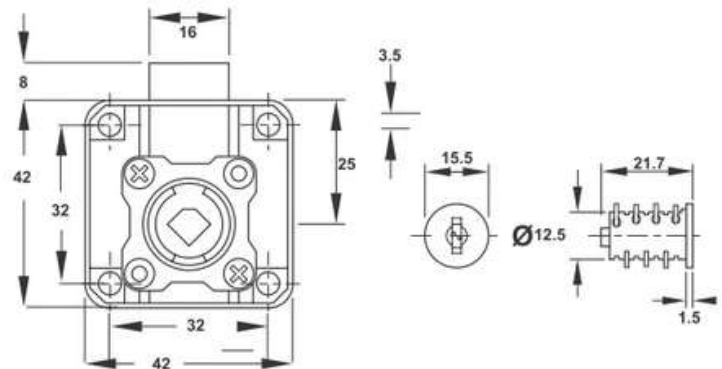

Type : **KLK - 022**



Keyless Combination Lock




Type : **COM - 04**

Suitable for :
- Public lock
- Personal lock

With override emergency key and decode function right, left, and vertical version available resetable combination, four digits

Led Alumunium Profile










Product Photos	Product Drawings	Model No.	Product Dimension (mm)	Width of LED Strip	Accessories
		MC-10-1 White	1000*25*15 mm	18 mm	end cap (metal), screw, clip (metal), PC Over
		MC-10-1 Clear			
		MC-10-2 White	2000*25*15 mm		
		MC-10-2 Clear			
		MC-11-1 White	1000*20*10 mm	15 mm	end cap (metal), screw, clip (metal), PC Over
		MC-11-1 Clear			
		MC-11-2 White	2000*20*10 mm		
		MC-11-2 Clear			
		MC-16-1 White	1000*15*11 mm	12 mm	end cap (metal), screw, clip (metal), PC Over
		MC-16-1 Clear			
		MC-16-2 White	2000*15*11 mm		
		MC-16-2 Clear			







Cover Led Light

knockers


Led Alumunium Profile

Product Photos	Product Drawings	Model No.	Product Dimension (mm)	Width of LED Strip	Accessories
		MC-A50-1 White	1000*17.3*7 mm	12 mm	end cap (plastic), clip (plastic), PC cover
		MC-A50-1 Clear			
		MC-A50-2 White	2000*17.3*7 mm		
		MC-A50-2 Clear			
		MC-A51-1 White	1000*23.5 *9.7 mm	20 mm	end cap (plastic), screw, clip (plastic), PC cover
		MC-A51-1 Clear			
		MC-A51-2 White	2000*23.5 *9.7 mm		
		MC-A51-2 Clear			
		MC-A531-1 White	1000*16*16 mm	10 mm	end cap (plastic), clip (plastic), PC cover
		MC-A531-1 Clear			
		MC-A531-2 White	1000*16*16 mm		
		MC-A531-2 Clear			
		MC-A532-1 White	1000*16*16 mm	10 mm	end cap (plastic), clip (plastic), PC cover
		MC-A532-1 Clear			
		MC-A532-2 White	2000*16*16 mm		
		MC-A532-2 Clear			
		MC-A541-1 White	1000*30*30 mm	20 mm	end cap (plastic), screw clip (plastic), PC Cover
		MC-A541-1 Clear			
		MC-A541-2 White	2000*30*30 mm		
		MC-A541-2 Clear			
		MC-A542-1 White	1000*30*30 mm	20 mm	end cap (plastic), clip (plastic), PC Cover
		MC-A542-1 Clear			
		MC-A542-2 White	2000*30*30 mm		
		MC-A542-2 Clear			
		MC-A56-1 White	1000*13*8 mm	12 mm	end cap (plastic), clip (plastic), PC cover
		MC-A56-1 Clear			
		MC-A56-2 White	2000*13*8 mm		
		MC-A56-2 Clear			


Led Alumunium Profile

Product Photos	Product Drawings	Model No.	Product Dimension (mm)	Width of LED Strip	Accessories
		MC-B39-1 White	1000*23*10 mm	20 mm	end cap (plastic), clip, PC cover
		MC-B39-1 Clear			
		MC-B39-2 White	2000*23*10 mm		
		MC-B39-2 Clear			
		MC-1818-1 White	1000*18.4* 18.4 mm	12 mm	end cap (plastic), clip (metal), PC cover
		MC-1818-1 Clear			
		MC-1818-2 White	2000*18.4* 18.4 mm		
		MC-1818-2 Clear			
		MC-1911-1 White (O)	1000*19*11 mm	16 mm	end cap (metal), screw, clip (metal), PC cover
		MC-1911-1 Clear (O)			
		MC-1911-2 White (O)	2000*19*11 mm		
		MC-1911-2 Clear (O)			
		MC-1911-1 White (S)	1000*19*11 mm	16 mm	end cap (metal), screw, clip (metal), PC cover
		MC-1911-1 Clear (S)			
		MC-1911-2 White (S)	2000*19*11 mm		
		MC-1911-2 Clear (S)			
		MC-2212-1 White	1000*22*12 mm	12 mm	end cap (plastic), PC cover
		MC-2212-1 Clear			
		MC-2212-2 White	2000*22*12 mm		
		MC-2212-2 Clear			
		MC-409-1 White	1000*18.2* 13.75 mm	14 mm	end cap (plastic), Cap (Plastic) PC cover
		MC-409-1 Clear			
		MC-409-2 White	2000*18.2* 13.75 mm		
		MC-409-2 Clear			


S001 PIR SENSOR

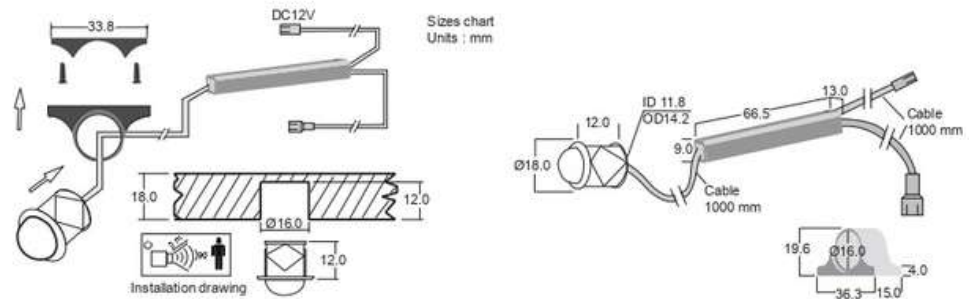

S002 IR SENSOR

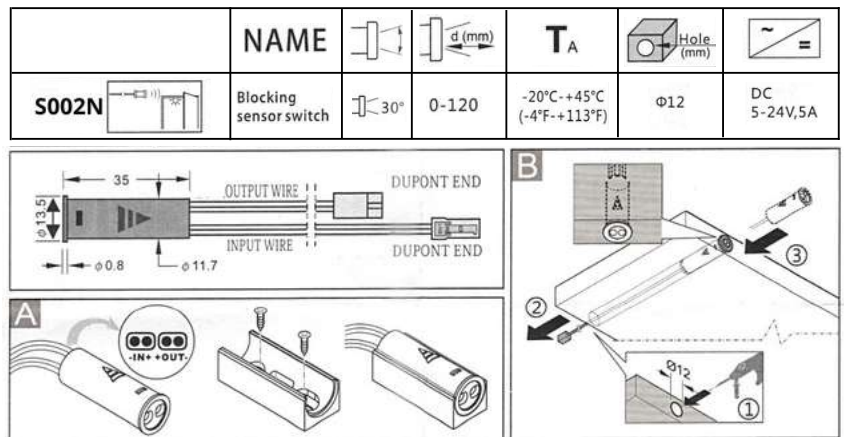

S003 TOUCH SENSOR



Item	Switch Mode	Volt	Rated Load	Sensing Distance
S001	PIR Sensor	12V	15W	< 1.5 m
S002	IR Sensor	12V	15W	< 10 cm
S003	Touch Switch	12V	15W	/
S004	Motion-activated Switch	12V	15W	< 10 cm

knockers®

PT. KNOCKERS INDONESIA

Kapuk kayu besar raya.

**Jl. H. Saidan No.38, RT.13/RW.11, Cengkareng
Tim., Kecamatan Cengkareng, Kota Jakarta
Barat, Daerah Khusus Ibukota Jakarta 11730**

Telp : (021) 5697 2200 / (021) 5697 2226

Hp : +62 877-8270-3588 / +62 877-5697-2200